

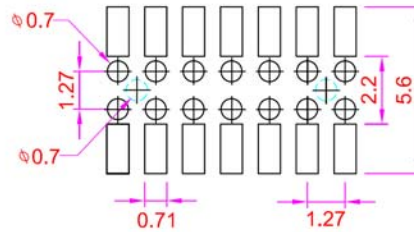
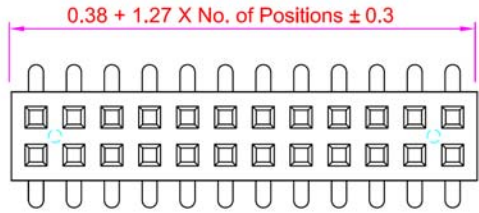


**Recommended
P.C. Board SMD Layout**



SPECIFICATIONS

- Current rating: 1 amp
- Contact material: Phosphor bronze
- Contact plating: Gold, tin or duplex
- Contact resistance: 20 milliohms max.
- Insulation resistance: 1,000 megohms min.
- Withstanding: 300VAC for 1 min.
- Operating temperature: -40°C to +105°C
- Processing temperature: 230°C for 30-60 sec. max.
260°C for 10 sec. max.

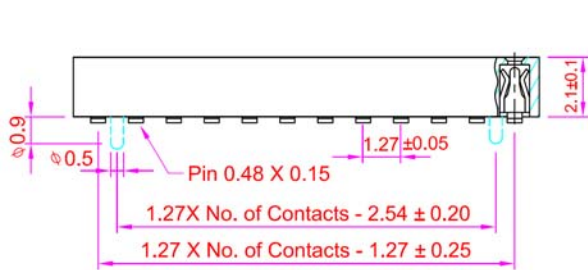

Series	Rows	Profile	Pos.	Contacts (D)	Plating	Options	Package
CRS	02	LPE	XX	X	XX	XX	XX
Receptacle strip, 1.27mm pitch	02=Dual row	2.3mm height	04-40	A=4.2 (std) B=4.5 C=4.8 D=5.0	TN=Tin SGXX=Duplex GDXX=Gold XX=Flash if blank, 3, 5, 10, 15µ"	SM=Surface mount CP=Centering Post	PPL=Pick cap PPF=Pick film TR=Tape and reel

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/22/06
				Checked	Lizzy	08/22/06
				Drawn	Tina	08/22/06
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CRS-02-LPE-XX-X-XX-SM**

Description: Receptacle strip, 1.27mm pitch, SMT type