


SPECIFICATIONS

Current rating: 1 amp
 Contact material: Phosphor bronze
 Contact plating: Tin or gold
 Contact resistance: 20 milliohms max.
 Insulator material: Polyester, UL94V-0
 For 4-25 pins: PA6T
 For 26-50 pins: LCP

Insulation resistance: 1,000 megohms min.
 Withstanding: 300VAC/VDC for 1 min.
 Temperature range: -40°C to +105°C

Recommended P.C.Board Layout (Tolerance: ±0.05)

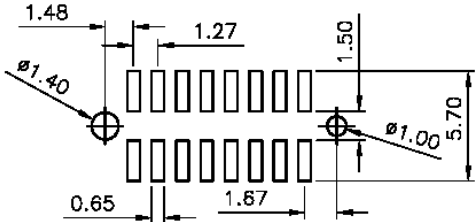

Series	No. of Rows	Type	Positions	Plating	Options
CRS	XX	SEC	XX	XX	XX
.05 x .05 receptacle strip	01=Single row 02=Dual row	SEC type	08-100	T=Tin GD=15µ" gold SG=15µ" selective gold	PP=Positioning pin TR=Tape and reel PPL=Pick and place pad

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CRS-02-SEC-30-SG-PP-TR-PPL**

Description: Female header, 1.27mm pitch, dual row, SMT type, with post