


SPECIFICATIONS

Current Rating:	1Amp
Contact Material:	Phosphor Bronze
Contact Resistance:	20mΩ Max.
Insulation Material:	Polyester, UL 94V-0
Insulation Resistance:	1000MΩ Min.
Withstanding:	300V AC/DC
Operating Temp:	-40°C to +105°C

Recommended P.C.B. Layout

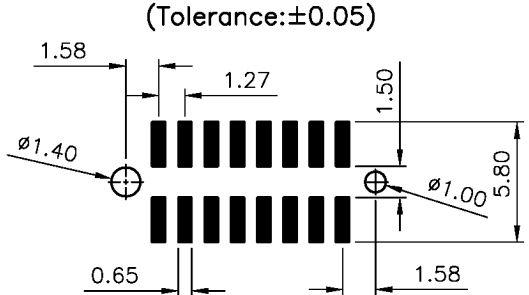

Series	Rows	Profile	Positions	Finish	Options
CRS	XX	XX	XX	XX	XX
0.05 x 0.05 Receptacle Strip	01=1 Row 02=2 Row	Blank=4.6mm	Single Row 03-50 Dual Row 06-100	TN=Tin SG=Selective Gold GD=Gold	P=Polarized CP=Centering Pegs SM=Surface Mount PPL=Pick & Place Pad PPT=Acetate Tape

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
A	DWG, PNT	01/28/10	Greg	Approved	Howard	05/15/07
				Checked	Lizzy	05/15/07
				Drawn	Tina	05/15/07
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CRS-02-XX-XX-P-CP-SM-PPL**

Description: 1.27 Female Header Dual Row SMT Type w/Post