


**SPECIFICATIONS**

Current Rating: 1 Amp Max.  
 Contact Material: Phosphor Bronze  
 Contact Plating: Tin  
 Housing Material: P.P.S or Nylon  
 Insulation Resistance: 10,000 Megohms Min.  
 Durability: 40 Cycles Min.  
 Normal Force: 200 Grams Min. on Tin/Tin & Interface  
 Operating Temp: -55°C to +105°C

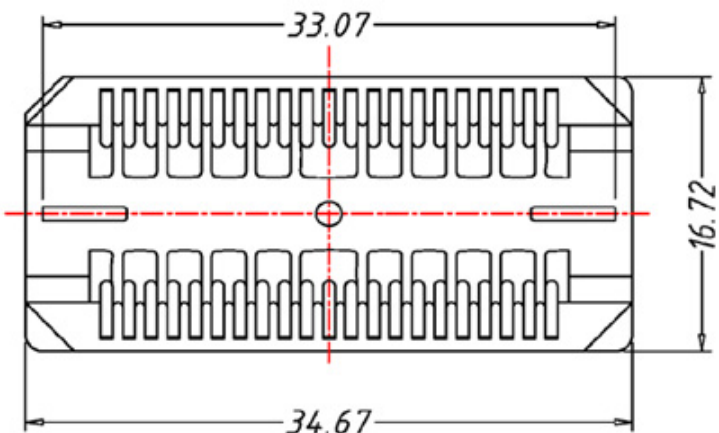

Series	Type	Positions	Plating	Options
CSJ	X	XX	XX	XX
SOJ socket	A1=.300" chip width B1=.400" chip width	20, 24, 26, 28, 32, 40, 42	TN=Tin GD=Gold	[blank]=None PP=Polarized NY=Nylon material LC=LC P material

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	8/02/08
				Checked	Lizzy	8/02/08
				Drawn	Tina	8/02/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CSJ-B1-42-TN-XX**

Description: 42 Pin SOJ Socket