


**SPECIFICATIONS**

- Current Rating: 1.5A Max
- Insulation Resistance: 500MΩ or More
- Withstanding: AC 500V 1 Minute
- Contact Resistance: 50MΩ Max.
- Mating Force: 250 Grams—2 Wire Lead  
500 Grams—4 Wire Lead
- Retention Strength: 7.7kg Between Jack and Plug
- Crimp Tensile Strength: 2.27kg
- Housing Material: ABS Resin UL94V-0
- Contact: 0.46mm Diameter Phosphor Bronze  
Gold Plating Over Nickel
- Terminal Material: 0.25mm Thickness 3/4 Hard Brass 2.5um
- Wire Style: UL1061 E41396 AWN 80C  
VW-1300V,26AWG, PVC Insulation  
Top Coated UL1061 Wire

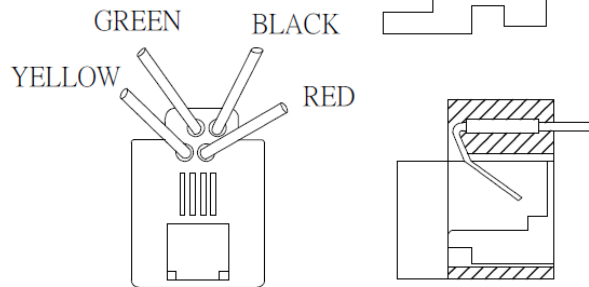

Series	Positions	Contacts	Body Style	Color	Plating
CTJ	4	04	616M	GY	PX
Modular jack, single position	4 positions	4 contacts	Wired panel mount	GY=Gray	P0=6μ" P1=15μ" P2=30μ" P3=50μ"

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/30/10
				Checked	Lizzy	08/30/10
				Drawn	Tina	08/30/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CTJ-4-04-616M-GY-PX**

Description: wired panel mount mod jack, 4C/4Pc