


PCB LAYOUT / TOP VIEW

SPECIFICATIONS

Voltage Rating: 125 V
 Current Rating: 1.5 A
 Contact Resistance: 30 milliohms max.
 Insulation Resistance: 500 megaohms min.
 Housing: PBT UL94V-0, Black
 Conductor: 0.35 0.42mm thickness, Phosphor Bronze
 Plating: Gold plated over Nickel on contact area
 Tin plated over Nickel on solder area
 Temperature: -40C to 70C
 Durability: 750 cycles min
 Withstanding: 1000 V

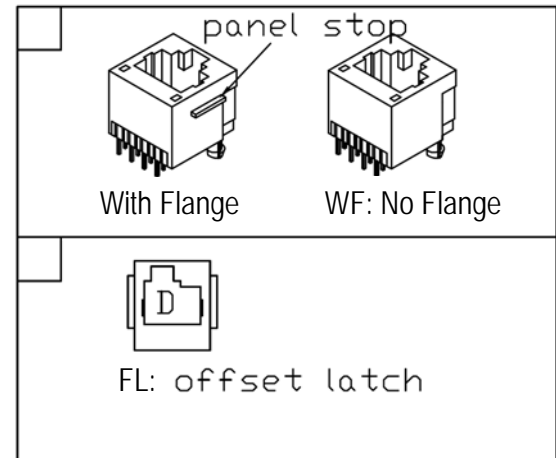

Series	Plug Size	Contacts	Type	Color	Plating	Options
CTP	XX	X	264	XX	PX	XX
Modular plug	4, 6, 8, 10	02, 04, 06, 08, 10	Top Entry, Split Peg	BK=Black	P1=15µ" gold P2=30µ" gold P3=50µ" gold	Blank=None WF=Without Flange KY=Keyed FL=Offset Latch

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/30/10
				Checked	Lizzy	08/30/10
				Drawn	Tina	08/30/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CTJ-6-06-264-BK-PX-XX**

Description: 6p6c Top Entry, Short Version