


**SPECIFICATIONS**


Voltage Rating: 125V AC Max  
 Current Rating: 1.5 A Max  
 Contact Resistance: 30 milliohms max.  
 Insulation Resistance: 500 Megaohms min.  
 Housing Material: PBT, UL94V-0, Black  
 Conductor: 0.35mm thickness phosphor bronze  
 Gold plated over Nickel on contact  
 Tin plated over Nickel on solder

Withstanding: 1000V AC  
 Temperature: -40C to +80C  
 Durability: 500 cycles min.

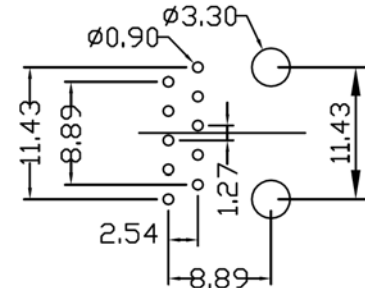

**PCB LAYOUT / TOP VIEW**

**OPTIONS**

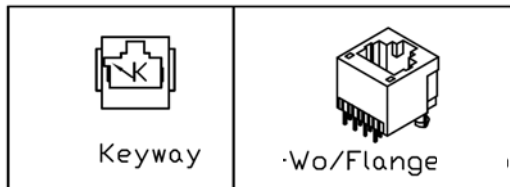

Series	Plug Size	Contacts	Plating	Options
CTP	XX	X	PX	XX
Modular plug	4, 6, 8, 10	2, 4, 6, 8, 10	P1=15μ" gold P2=30μ" gold P3=50μ" gold	[blank]=Oval (flat) RW=Round wire SD=.8 dia. conductor SW=Solid wire (stranded if omitted) MS=Metal shield KY=Keyed OS=Offset latch WF=w/o Flange

**RoHS compliant**

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	07/10/02
				Checked	Lizzy	07/10/02
				Drawn	Tina	07/10/02
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CTJ-8-08-264-BK-PX-XX**

Description: Top Entry Short Version