
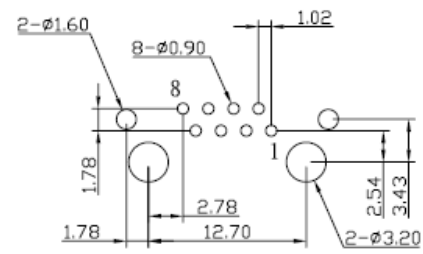


**SPECIFICATIONS**

- Contact Material: 0.35mm Phosphor Bronze, Gold Plating
- Housing: Nylon-46, UL94V-0, Black
- Shield: 0.25mm thick Copper alloy, Nickel Plating
- Insulation Resistance: 500MΩ Min.
- Voltage Rating: 150V AC
- Contact Resistance: 20mΩ Max.
- Current Rating: 1.5 Amps



PC BOARD LAYOUT/TOP VIEW

Series	Positions	Contacts	Type	Color	Plating	Options	Panel Grounds
CTJ	8	08	714	BK	P1	FS	PGX
Mod jack, single port	8=8 positions	08=8 contacts	Type=714	BK=Black	P1=15μ" gold P2=30μ" gold P3=50μ" gold	[blank]=No shield FS=Full shield	[blank]=None 2=Top 4=Side 6=Top and sides

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CTJ-8-08-714-BK-PX-FS-PG6**

Description: Modular Jack Side Entry, Shielded w/o LED