



**SPECIFICATIONS**

- Contact material: Phosphor bronze 0.35mm
- Contact plating: Gold on contact area  
Tin on solder tails
- Housing material: DSM Stanyl TE250F6 (Nylon46)  
Heat deflection temp. 290°C, UL94V-0
- Shield material: Copper alloy 0.25mm
- Shield plating: Tin

Note: Cavity conforms to FCC rules and regulations Part 68, Subpart F

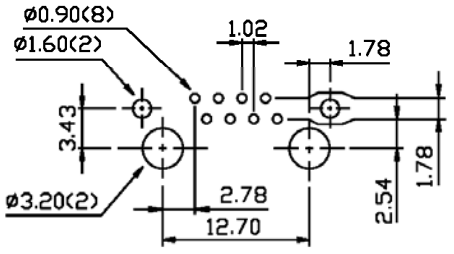

Series	Positions	Contacts	Style	Color	Plating	Options	Panel Grounds
CTJ	X	XX	C4	BK	PX	XX	PGX
Modular jack, single position	8=8 positions 10=10 positions	06=6 contacts 08=8 contacts 10=10 contacts	Style C4	BK=Black	P1=15µ" gold P2=30µ" gold P3=50µ" gold	[blank]=None FS=Full shield	[omitted]=None 4=Sides 1=Top (single) 6=Top & sides 2=Top

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	01/03/02
				Checked	Lizzy	01/03/02
				Drawn	Tina	01/03/02
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CTJ-8-08-C4-BK-PX-FS**

Description: Modular jack, 8 position, shielded, flat pin, side entry

