
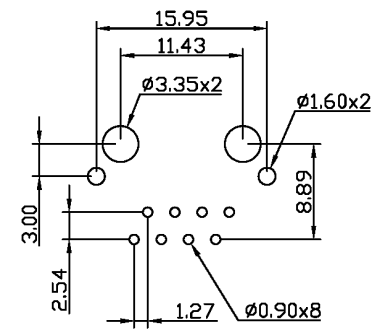



SPECIFICATIONS

Contact material: Phosphor bronze 0.35mm
 Contact plating: Gold (15µ", 30µ", 50µ" options)
 Tin in solder area
 Housing material: PBT polyester with mixed glass fiber, UL94V-0, black
 Shield material: Copper alloy 0.25mm
 Shield plating: Nickel



PC Board Layout

Flange Option

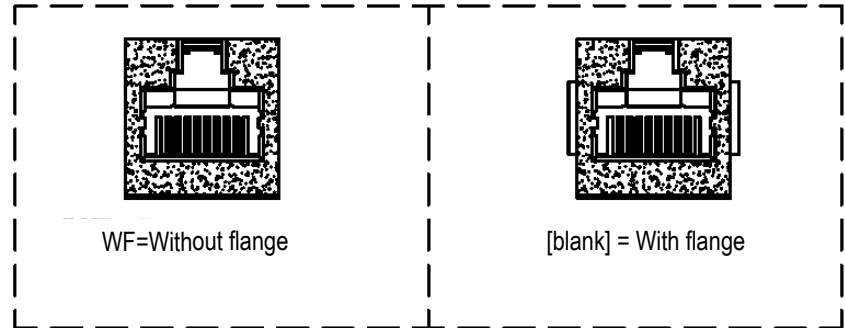

Series	Positions	Contacts	Body Style	Color	Plating	Options
CTJ	X	XX	D260	BK	PX	XX
Modular jack	6,8,10	4,6,8,10	Top entry	BK=Black	P1=15µ" gold P2=30µ" gold P3=50µ" gold	[blank]=None FS=Full shield WF=Without flange KY=Keyed

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
A	PNT	2/27/08	Greg	Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CTJ-8-08-D260-D1-BK-PX-XX**

Description: Top entry shielded jack, 8P8C