
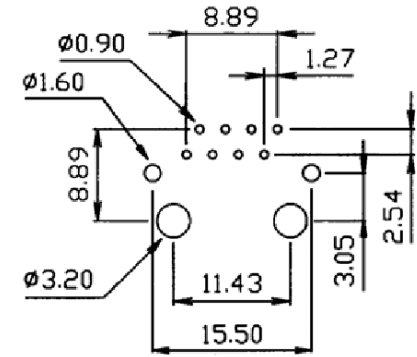
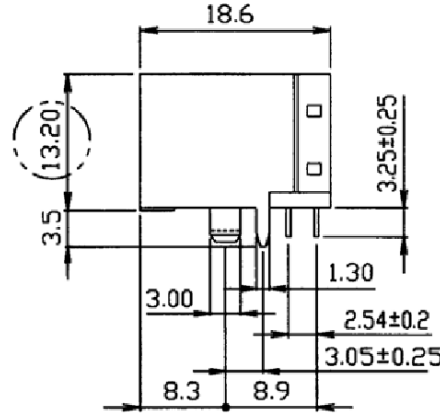



SPECIFICATIONS

Housing material: PBT with glass fiber, UL94V-0
 Contact material: Phosphor bronze, 0.45mm diam. round
 Contact plating: Hard gold
 Shield material: Copper alloy 0.25mm
 Shield plating: Tin over nickel


Cavity conforms to FCC rules and regulations Part 68, subpart F



PC Board Layout



DETAIL X



Series	Positions	Contacts	Style	Color	Plating	Options
CTJ	X	XX	D	BK	PX	XX
Modular jack	4, 6, 8	2, 4, 6, 8	D style	BK=Black	P1=15µ" gold P2=30µ" gold P3=50µ" gold	[blank]=Flange WF=No flange KY=Keyed FS=Full shield

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	11/10/00
				Checked	Lizzy	11/10/00
				Drawn	Tina	11/10/00
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CTJ-8-08-E4-BK-P1-FS**

Description: Modular jack, 8 position, shielded, low profile, side entry, PCB mount