




SPECIFICATIONS:

Housing: PBT Polyester UL94V-0, Black
 Shield: 0.25mm Thick Copper Alloy, Nickel Plated
 Contacts: 0.35mm Thick Phos Bronze Gold Plating, Gold Flash in Solder Area

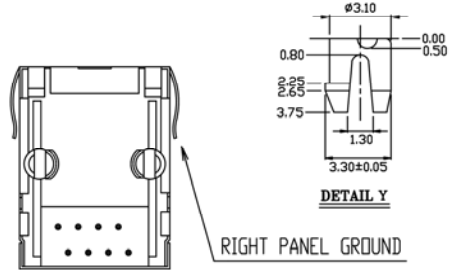

Panel Grounds (X)	
Blank	None
1,2	Top
4	Sides
6	Both

Series	Positions	Contacts	Body Style	Ground tab offset	Color	Plating	Options
CTJ	8	08	HC5	D1	XX	PX	FS6
Modular jack, single position	8=8 pos.	08=8 Contacts	Side entry, bottom latch, 2 pins tilted	[blank]=No shield A1, B1, C1, D1 See spec for dimensions	BK=Black GY=Gray	P0=6μ" P1=15μ" P2=30μ" P3=50μ"	Blank=None FSX=Full shield (see chart)

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	06/01/07
				Checked	Lizzy	06/01/07
				Drawn	Tina	06/01/07
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CTJ-8-08-HC5-D1-XX-PX-FS6**

Description: CAT5 Mod Jack, 8P8C Shielded w/2 Pins Tilted