


SPECIFICATIONS:

Housing: PBT Polyester UL94V-0
 Mixed Glass Fiber, Black
 Contact: 0.35mm Thick Phos-Bronze Plated
 Gold Plating & Gold Flash in Solder Area
 Shield: 0.25mm Thick Copper Alloy, Nickel Plating

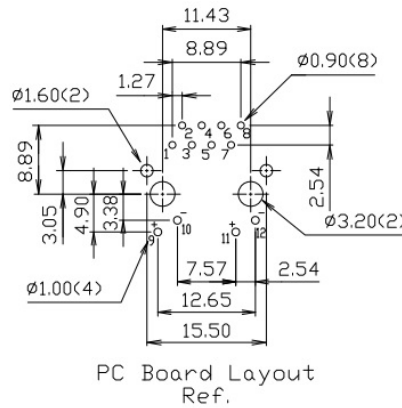

LED Color Codes	
Code	LED
R	Red
G	Green
Y	Yellow
O	Orange
A	Amber
D	Red/Green
E	Red/Yellow
W	Yellow/Green
P	Orange/Green
K	Blank

Panel Grounds (X)	
Blank	None
1,2	Top
4	Sides
6	Both

Series	Positions	Contacts	Body Style	LED	Ground tab offset	Color	Plating	Options/Panel Grounds
CTJ	8	08	H	LXX	D1	XX	PX	FS2
Modular jack, single position	8 Positions	8 Contacts	Side Entry Bottom Latch	L=LEDs XX=Left/Right (see chart)	[blank]=No shield A1, B1, C1, D1 See spec for dimensions	BK=Black GY=Gray	P0=6μ" P1=15μ" P2=30μ" P3=50μ"	Blank=None FSX=Full shield (see chart)

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	06/01/07
				Checked	Lizzy	06/01/07
				Drawn	Tina	06/01/07
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CTJ-8-08-HLGY-D1-XX-PX-FS2**

Description: Mod jack, side entry bottom latch with LEDs