


SPECIFICATIONS

Voltage Rating: 125 VAC
 Current Rating: 1.5 Amp
 Contact Resistance: 40 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min
 Withstanding: 1000 Vac
 Operating: 700 Cycles
 Storage Temp: -40C to +85C
 Operating Temp: -20C to +75C
 Housing: Thermoplastic UL94V-0
 Contact: Phosphor Bronze
 Plating: Gold over Nickel in Contact / Tin over Nickel in Solder
 Shield: Brass Plating over Nickel

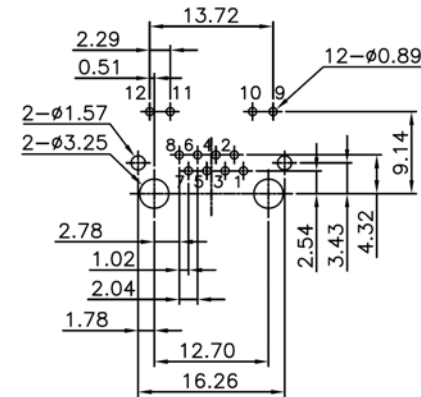

P.C.B LAYOUT/TOP VIEW

Series	Positions	Contacts	Type	Color	Plating	Options	Panel Grounds
CTJ	8	08	J99LXX	BK	P1	FS	PG6
Mod jack, single port	8=8 positions	08=8 contacts	J99LYG Style G=Green LEDs Y=Yellow LEDs	BK=Black	P1=15µ" gold P2=30µ" gold P3=50µ" gold	[blank]=No shield FS=Full shield	[blank]=None 1=Top 2=Side 3=Top and sides

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/22/06
				Checked	Lizzy	08/22/06
				Drawn	Tina	08/22/06
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CTJ-8-08-J99LYG-BK-P1-PG1**

Description: 8P8C Jack W/ LEDs

