



**SPECIFICATIONS**

Voltage Rating: 125 VAC RMS  
 Current Rating: 1.5 AMP @25°C  
 Contact Resistance: 20 Milliohms Max  
 Insulation Resistance: 1000 Megohms Min  
 Withstanding: 1000V  
 Housing: PA66+30%GF UL94V-0, Black  
 Terminals: Phosphor Bronze  
 Plating: Selective Gold in Contact Area  
 Tin over Nickel in Solder Tail  
 Brass over Nickel in Solder Area  
 Shield: 30N Max.  
 Mating Force: 20N for 60S ±5S  
 Retention Strength: 20N for 60S ±5S

**RoHS compliant**

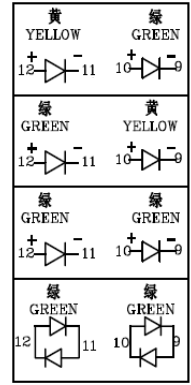

Panel Grounds (X)		LED Color Codes	
Blank	None	Code	LED
		G	Green
2	Top	Y	Yellow
4	Sides	A	Amber
6	Both	K	No LED

Series	Positions	Contacts	Body Style	LED	Color	Plating	Options
CTJ	0X	XX	ZC2	LXX	XX	PX	XX
Modular Jack	08	6-8	Top latch side entry	L=LEDs XX=Left/Right (see chart)	BK=Black	P0=6µ" P1=15µ" P2=30µ" P3=50µ"	Blank=None FSX=Full shield, panel grounds (see chart)

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/30/10
				Checked	Lizzy	08/30/10
				Drawn	Tina	08/30/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CTJ-8-08-ZC2LXX-BK-PX-FS5**

Description: shielded modular jack with LED, top latch side entry