


SPECIFICATIONS

Housing material: PBT polyester w/ glass fiber, UL94V-0, black
 Contact material: Phosphor bronze, $\varnothing 0.45\text{mm}$ round
 Contact plating: Hard gold
 Shield material: Copper alloy 0.25mm
 Shield plating: Nickel

Cavity conforms to FCC rules and regulations Part 68, subpart F

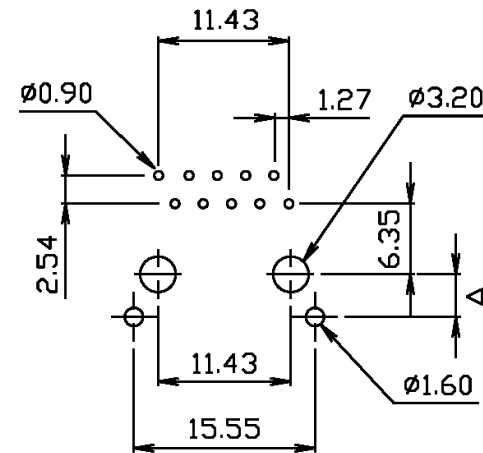

PC Board Layout

Series	Positions	Contacts	Type	Ground Offset Tab (Dim. A)	Color	Plating	Options	Panel Grounds
CTJ	X	XX	E	XX	BK	PX	XX	PGX
Modular jack	4, 6, 8, 10	2, 4, 6, 8, 10	E type	A1=4.57 B1=3.65 C1=3.05	BK=Black	P1=15 μ " gold P2=30 μ " gold P3=50 μ " gold	[blank]=Flange KY=Keyed FS=Full shield	2=Top 4=Sides 6=Top & sides

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	01/05/00
				Checked	Lizzy	01/05/00
				Drawn	Tina	01/05/00
				0.0 \pm 0.35	0.00 \pm 0.20	Angles \pm 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CTJ-8-08-E-XX-BK-PX-FS-PG6**

Description: Modular jack, 10 position, side entry, rounded pin, very low profile, shielded, PCB mount