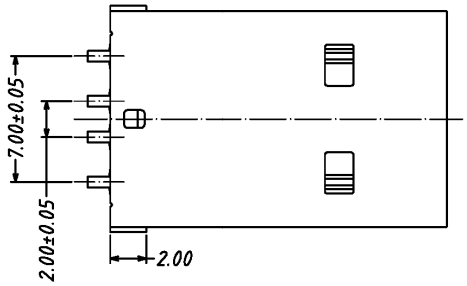

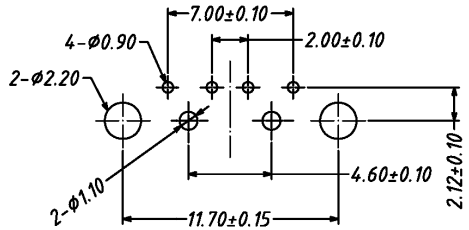



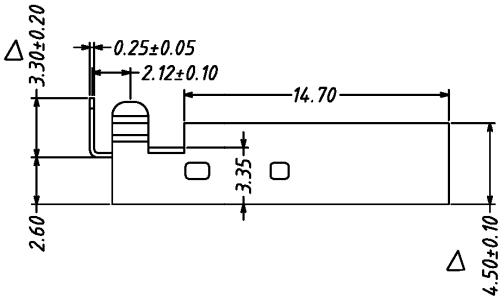



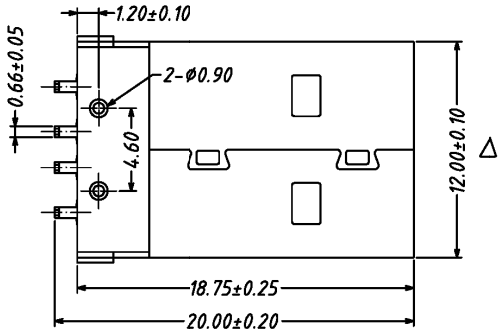

SPECIFICATIONS

Voltage Rating:	1 AMP 30V AC
Contact Material:	Copper
Contact Resistance:	30MΩ Max
Shell Material:	Steel
Housing Material:	UL94V-0
Insulation Resistance:	1000MΩ Min
Withstanding:	500V AC
Durability:	3000 cycles min.
Temperature Range:	-20ºC to +85ºC

RoHS compliant

Rev.	Description	Date	Approved

Drawing	Name	Date
Approved	Howard	08/28/07
Checked	Lizzy	08/28/07
Drawn	Tina	08/28/07

0.0 ± 0.35 0.00 ± 0.20 Angles ± 3'

UNIT: mm

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CUSB-A-JRS10-04MLS7N3NC**

Description: USB A Type 4 Pin Male 90º DIP (2.0 version)