
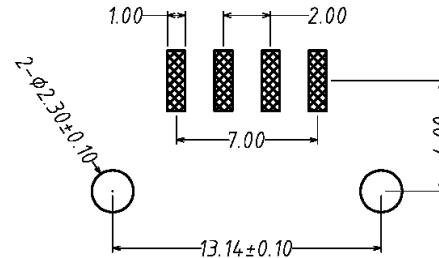





**SPECIFICATIONS**

Current rating: 1.5 amps max.  
 Voltage rating: 30 volts max.  
 Contact resistance: 30 megohms min.  
 Withstanding: 500VAC for 1 min.  
 Temperature range: -55°C to +85°C



RoHS compliant

**RECOMMENDED P.C.B. PATTERN LAYOUT**

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CUSB-JRS7-04-F-S-7-N3A**

Description: USB connector, type A, 4 pin, female, surface mount