


SPECIFICATIONS
 Voltage & Current: 1.5A at 250VAC Minimum
 Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 1000M Ohm Min. At 500VDC.
 Durability: 1500 Cycles
 Insertion Force: 35 Newton Maximum
 Extraction Force: 10 Newton Minimum
 Withstanding: 500V AC for 1 Minute

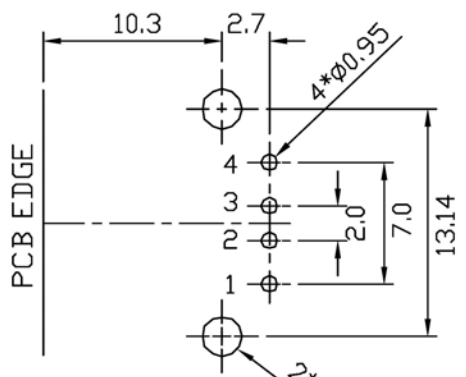

PCB LAYOUT
(BOTTOM VIEW)

Item	Name	Material	Finish	
1	Housing	PBT G.F.	White	
2	Terminal	Phos. Bronze T:0.25	Gold/Tin Plated	Gold: 30u"; Ni:40-60u"; Tin:120u"
3	Shell	Brass T:0.3	Nickel Plated	Ni:80-120u"

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	09/15/10
				Checked	Lizzy	09/15/10
				Drawn	Tina	09/15/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CUSB-A-KS001-ANW(2.0)-L**

Description: USB A Type Flat 4 Pin DIP