
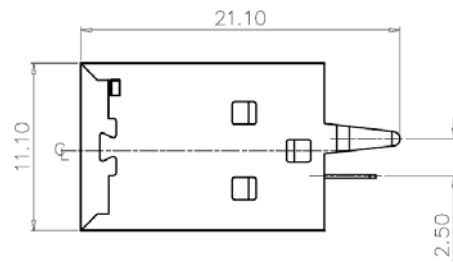


RECOMMEND PCB LAYOUT(±0.05)

SPECIFICATIONS

Current Rating: 1A Max
 Contact Resistance: 30 Milliohm Max
 Withstanding: 500 VAC rms
 Insulation Resistance: 1000 Megohms Min
 Insertion Force: 3.57Kgf max
 Extraction Force: 1.02Kgf min
 Housing: PBT+30%GF Black
 Contact: Brass
 Front Shell: SPCC
 Shell After: SPCC
 Contact: Gold Plated on Contact Area
 Tin on Solder Area, Nickel Underplating
 Front Shell: 100 u" Semi Bright Nickel Plating Overall
 Shell After: 100 u" Semi Bright Nickel Plating Overall



Series	Type	Style	Ports/Gender/Cont/Mount	Shell Plating	Contact Plating	Color	Options
CUSB	B	304	RK1F4VT	N	GD	BL	KT
USB Connector	Type B	Style 304	Single Port Female, 4 Contacts, Vertical Through Hole	N=Nickel	GD=Gold	BL=Blue	KT=Kinked Tail

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	05/14/06
				Checked	Lizzy	05/14/06
				Drawn	Tina	05/14/06
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CUSB-B-304-RK1F4VT-N-GD-BL-KT**

Description: USB B Version 2.0 Female , vertical through hole