

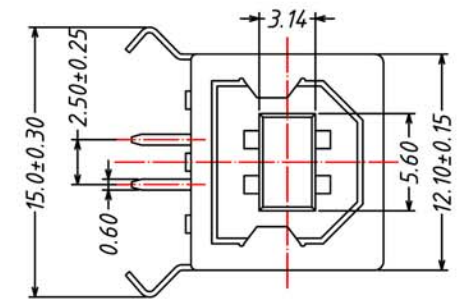


RECOMMENDED P.C.B. PATTERN LAYOUT

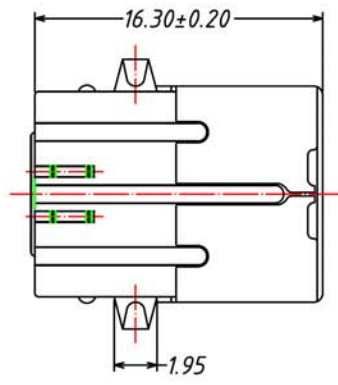


SPECIFICATIONS

- Housing: LCP Glass Fiber UL94V-0
- Contact: Brass T=0.25mm
- Contact Plating: Au1u"+Sn80~100u"+Ni60u"
- Shell: SPCC T=30mm Iron T=0.3mm
- Shell Plating: Cu80~100u" Ni100u"~120u"
- Contact Resistance: 30 Milliohms Max
- Insulation Resistance: 1000 Mega Ohms Min
- Withstanding: 500V AC / 1 min
- Operating Temp: -55C ~ +260C
- Furnace Temp: 260C / 5 Sec.

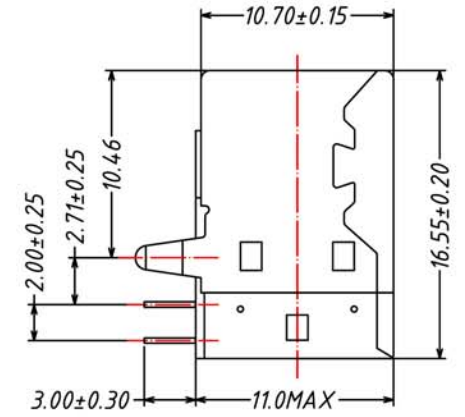

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	12/03/10
				Checked	Lizzy	12/03/10
				Drawn	Tina	12/03/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				 UNIT: mm		


Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CUSB-B-F1-RA-BF90-WT-TH**

Description: USB B Type 4 Pin Female 90 DIP, High Temp Material