


SPECIFICATIONS
 Voltage Rating: 1 AMP 30V AC
 Contact Material: Copper Alloy
 Contact Resistance: 50mΩ Max.
 Housing Material: Thermoplastic, UL94V-0
 Shell Material: Copper Alloy
 Insulation Resistance: 100MΩ Min.
 Withstanding: 100V AC
 Operating Temp: -20°C to +85°C

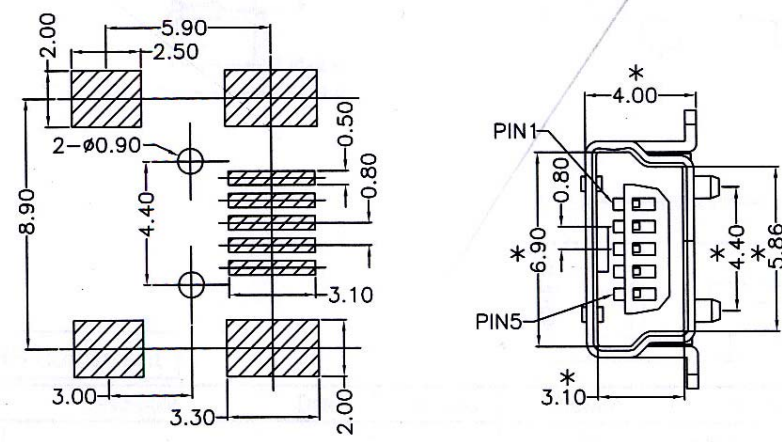

PC BOARD LAYOUT

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	06/07/05
				Checked	Lizzy	06/07/05
				Drawn	Tina	06/07/05
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CUSB-B-JRS11-05FS1N3EAE**

Description: Mini USB Type B, Female SMT