


SPECIFICATIONS
 Current Rating: 1.5A Max.
 Voltage Rating: 30V Max.
 Contact Resistance: 30mΩ Max
 Insulation Resistance: 1000MΩ Min
 Mating: 35N Max.
 Withdrawal: 10N Min.
 Durability: 1500 Cycles Min.
 Withstanding: 5000V AC
 Operating Temp: -55°C ~ +85°C

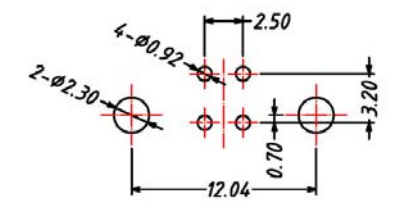

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	03/12/08
				Checked	Lizzy	03/12/08
				Drawn	Tina	03/12/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				 UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CUSB-B-JRS2-04FS7AN3B**

Description: USB B Type 4 Pin Female 180° DIP