





SPECIFICATIONS

Current rating: 1 amp
 Contact resistance: 30 milliohms max.
 Insulator resistance: 1,000 megohms min. at 500VDC
 Withstanding: 500VAC for 1 min.
 Operating temperature: -55°C to +105°C

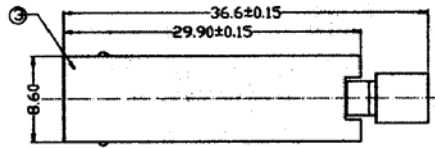

Item	Name	Material	Finish
1	Insulator	PBT	UL94V-0
2	Contact	Phosphor bronze	Gold over nickel
3	Front shell	Brass	Nickel
4	Back shell	Brass	Nickel

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CUSB-B-M-WM-ASM-XX**

Description: USB connector, type B, 4 pin male solder type assembly