



10nF Capacitor Connected Between Vbus And GND

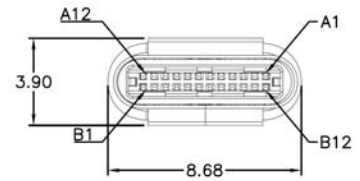


SPECIFICATIONS

- Current Rating: 0.5A
- Contact Resistance: 30MΩ Max
- Insulation Resistance: 100MΩ Min 250V DC
- Withstanding Voltage: 250V AC
- Welding Test: 250°C
- Mating Force: 1.02 KGF Min
- Insulation Material: LCP 30% GF UL94V-0
- Contact Material: C5210 T=0.20mm Gold Flash over Nickel
- Shell Material: SUS T=0.15mm Ni
- Hook Material: SUS T=0.30mm Ni
- Spring Piece: SUS T=0.10mm
- Cover Material: SPCC T=0.20mm Ni
- Under Cover: SPCC T=0.20mm Ni

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	07/16/15
				Checked	Lizzy	07/16/15
				Drawn	Tina	07/16/15
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				 UNIT: mm		



Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: CUSB-C31-ML14-1M24PS-GD-TR

Description: USB 3.1 Type C Male 24Pin Clamp Board SMT Type
0.8mm With PCB