


PC Board Layout
(Component Side)

SPECIFICATIONS

Current rating:	1 amp
Contact material:	Phosphor bronze
Contact plating:	Gold flash over nickel
Shell plating:	Nickel
Insulator material:	Nylon 6T+GF, UL94V-0
Contact resistance:	30 milliohms max.
Insulation resistance:	1,000 megohms min. at 500VDC
Withstanding:	750VAC for 1 min.
Operating temperature:	-55°C to +105°C

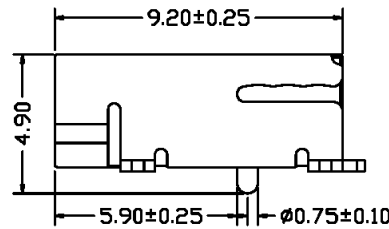

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	09/10/00
				Checked	Lizzy	09/10/00
				Drawn	Tina	09/10/00
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CUSB-M1208**

Description: Mini USB connector, 5-pin, female, SMT type