

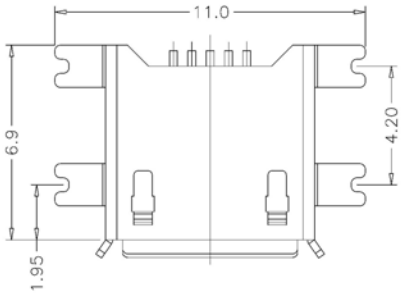



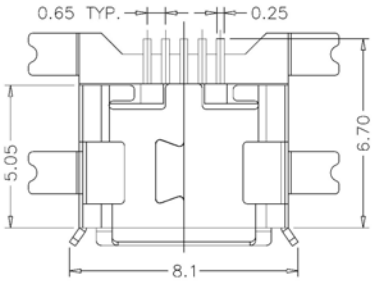

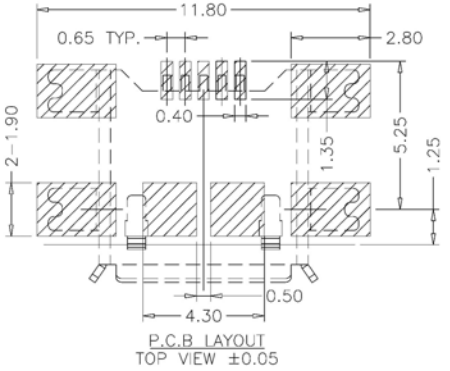



SPECIFICATIONS

Housing:	Plastic UL94V-0
Shell:	Copper Alloy , Tin Plating
Terminal:	Copper Alloy, Gold Plating
Current Rating:	1.8 Amp max
Withstanding:	100V AC for 1 minute
Contact Resistance:	30m ohms max.
Insulation Resistance:	100M ohms at DC 500V
Operating Temp:	-25C ~ +105C

Series	Type	Pos	Plating	Package
CUSB-UB	22TCH	05	GDX	XX
Micro USB Type B	22TCH Type	05=5 pos.	GDX=Gold X=Flash if blank, 5,10,15,30u"	TR=Tape & Reel TB=Tube

RoHS compliant

Rev.	Description	Date	Approved

Drawing	Name	Date
Approved	Howard	03/20/09
Checked	Lizzy	03/20/09
Drawn	Tina	03/20/09

0.0 ± 0.35 0.00 ± 0.20 Angles ± 3'

UNIT: mm

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CUSB-UB-22TCH-05-GDX-XX**

Description: Micro USB B Type PCB Mount SMT Board Cut Type