
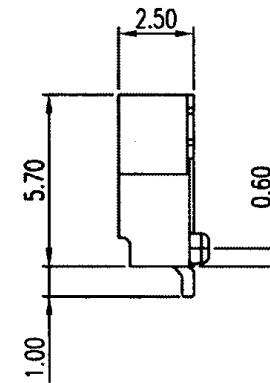
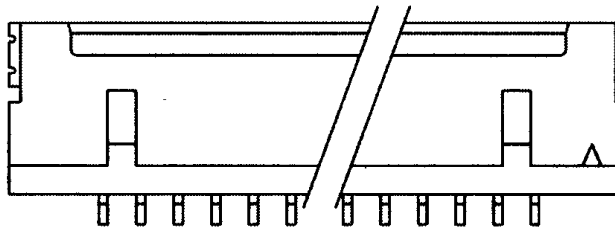


SPECIFICATIONS

Voltage rating: 250 volts
 Current rating: 1 amps
 Contact material: Brass
 Contact plating: Tin
 Housing material: Nylon 66, UL94V-0
 Tab material: Brass
 Withstanding: 500VAC for 1 min.
 Insulation resistance: 1,000 megohms min.
 Operating temperature: -25°C to 85°C

Dimensions			
Pos.	A	B	C
20	23.75	30.00	28.95
25	30.00	36.25	35.20
30	38.25	42.50	41.45

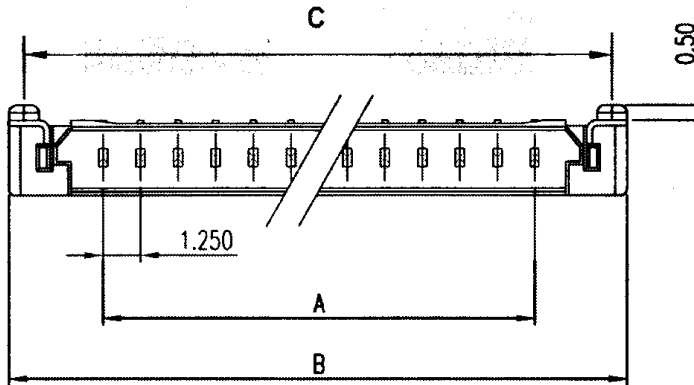

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	10/26/00
				Checked	Lizzy	10/26/00
				Drawn	Tina	10/26/00
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CWL-1253-SMT-XX**

Description: Wafer, 1.25mm pitch, SMT type