


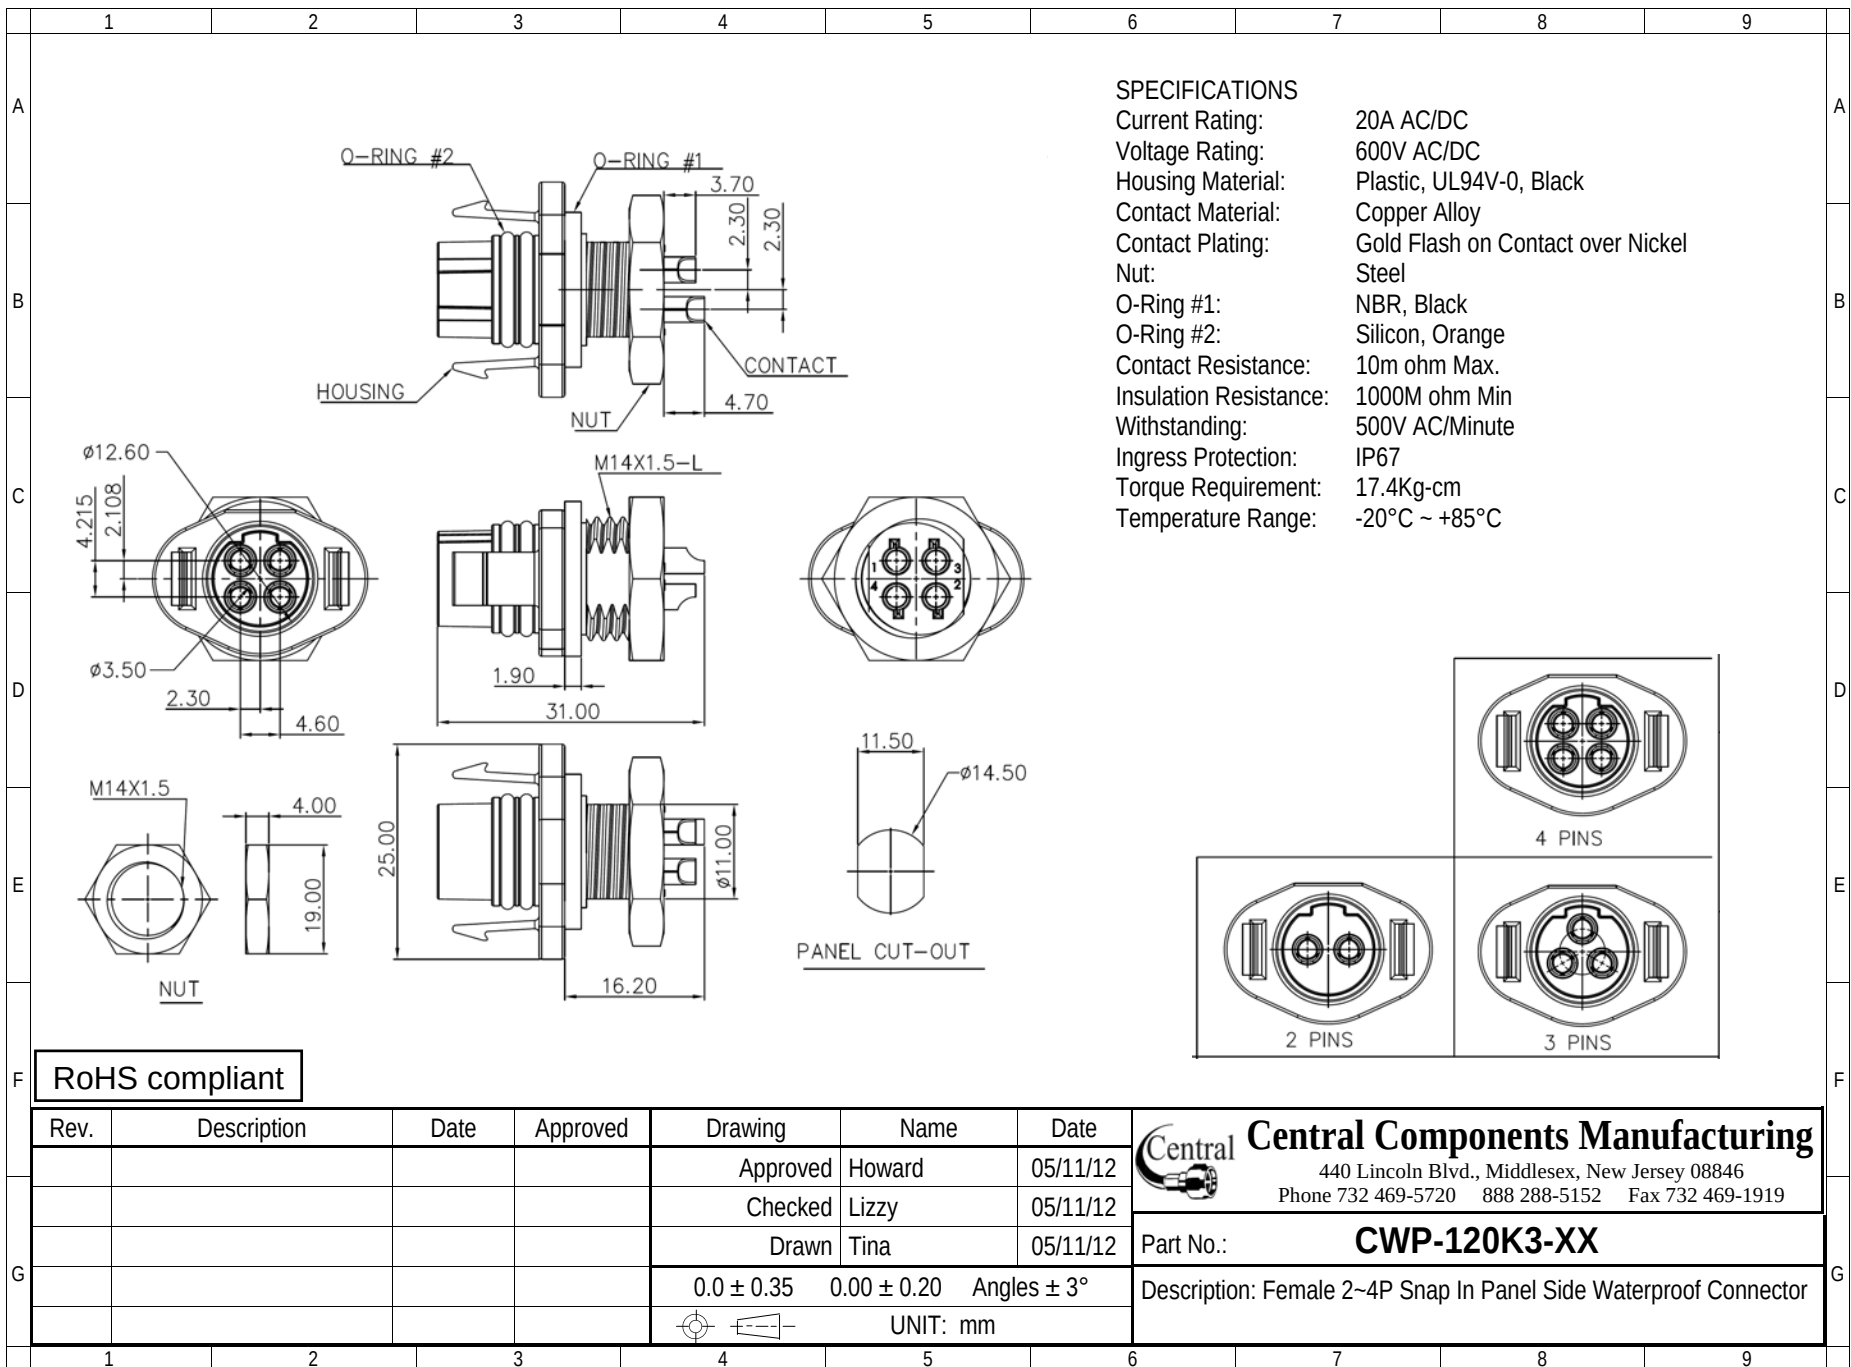

SPECIFICATIONS

Current Rating:	20A AC/DC
Voltage Rating:	600V AC/DC
Housing Material:	Plastic, UL94V-0, Black
Contact Material:	Copper Alloy
Contact Plating:	Gold Flash on Contact over Nickel
Nut:	Steel
O-Ring #1:	NBR, Black
O-Ring #2:	Silicon, Orange
Contact Resistance:	10m ohm Max.
Insulation Resistance:	1000M ohm Min
Withstanding:	500V AC/Minute
Ingress Protection:	IP67
Torque Requirement:	17.4Kg-cm
Temperature Range:	-20°C ~ +85°C