


SPECIFICATIONS

Current Rating:	20A AC/DC
Voltage Rating:	600V AC/DC
Contact Resistance:	1000M ohm min.
Withstanding:	500V AC/minute
Torque:	17.4Kg-cm
O-Ring:	Silicon
Housing:	540Z, UL94V-0, Black
Contact:	C1100R-1/2H
Contact Plating:	Tin or Gold over Nickel
Nut:	Brass, 30u" Nickel Plating
Protection:	IP68
Temperature Range:	-20C ~ +85C

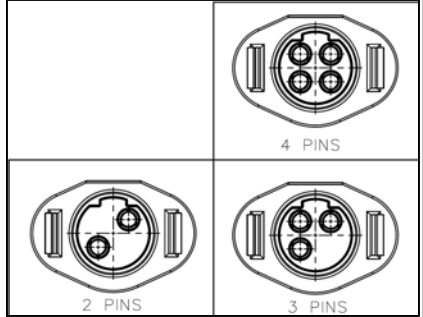

Series	Type	Pins	Style	Plating	Options
CWP	M13-A100	XX	XX	XX	X
Waterproof Connector	M13 Connector A100 Style	02,03,04	MP=Male Panel Mount FP=Female Panel Mount MW=Male Wire Mount FW=Female Wire Mount MWM=Male Overmolded FWM=Female Overmolded	GD=Gold TN=Tin	Blank=Orange O-ring BK=Black O-ring

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	01/12/12
				Checked	Lizzy	01/12/12
				Drawn	Tina	01/12/12
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
						UNIT: mm

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CWP-M13-A100-XX-FP-XX**

Description: Female 2-4P A100 Style Snap in Panel Side Waterproof Connector