



**SPECIFICATIONS**

Contact Rating: 1A max  
 Voltage Rating: 125V max  
 Contact Resistance: 20 milli ohm max.  
 Insulation Resistance: 1000 meg ohm min.  
 Withstanding: 500V AC/1-min. 10mA  
 Durability: 100 cycles with contact resistance of 30 milli ohm max.  
 Processing temp: 200°C 90-120 sec  
 245°C 3-5 sec  
 Retention Force: 3-10 pin: 0.05 x pin +0.15Kg min  
 11-40 pin: 0.05 x pin +0.40Kg min.

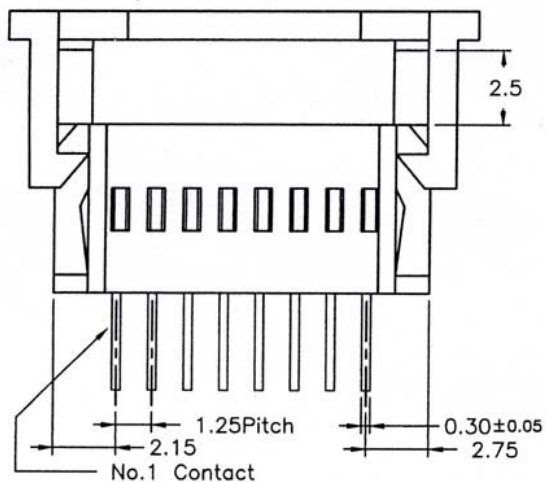

**PCB Layout**

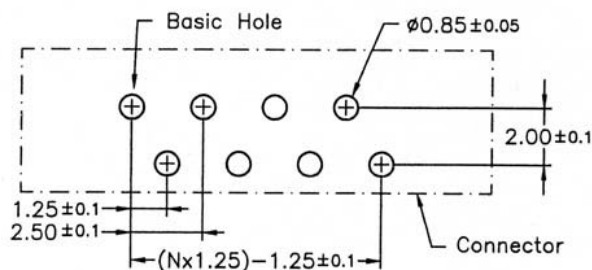

Series	Style	Position	Type	Plating
CZF	A	XX	UT	TN
FPC/FFC Connector	1.25mm pitch	03-40	Upper Contact	TN=Tin

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CZF-A-XX-UT**

Description: FPC Connector