

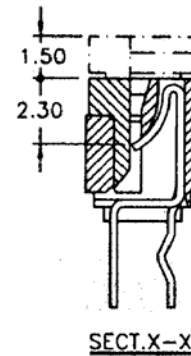
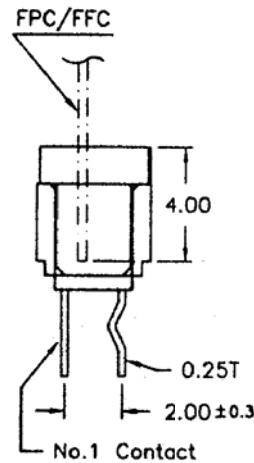


**SPECIFICATIONS**

Voltage rating: 250VAC max.  
 Current rating: 1 amp max.  
 Contact material: Phosphor bronze  
 Contact plating: Bright tin 100µ", MIL-T-10727, type 1  
                   Over copper 50µ", MIL-C-14550  
 Contact resistance: 20 milliohms min.  
 Insulator material: LCP, glass reinforced thermoplastic,  
                           UL94V-0, natural  
 Insulation resistance: 5,000 megohms min. @ 1,000VDC  
                           between adjacent contacts (75°F and 50% R.F.)  
 Withstanding: 1,000VAC min. RMS at sea level

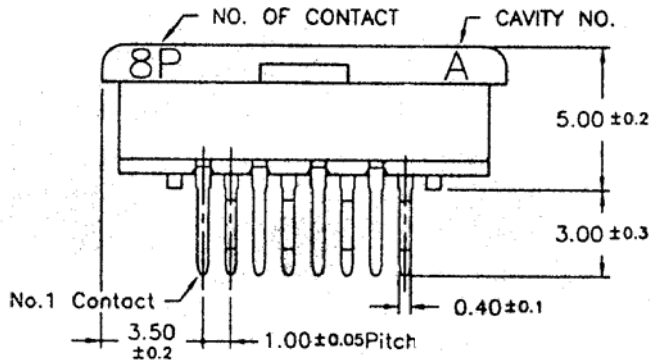

PCB Layout

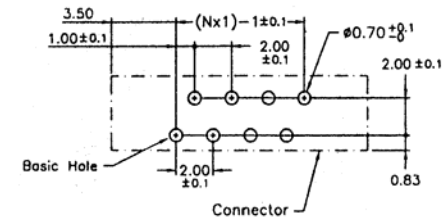

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/98
				Checked	Lizzy	08/10/98
				Drawn	Tina	08/10/98
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CZF-B-XX-VT**

Description: FPC connector, vertical entry style, .039" (1.00) centerline, ZIF type

G

G