



SPECIFICATIONS

Current rating: 0.5 amps
 Contact material: Phosphor bronze
 Contact resistance: 20 milliohms max. at 100 mA
 Board contacts: Brass
 Contact plating: Tin
 Housing material: High temperature material, UL94V-0
 Insulation resistance: 100 megohms min. at 500VDC
 Operating temperature: -55°C to +85°C

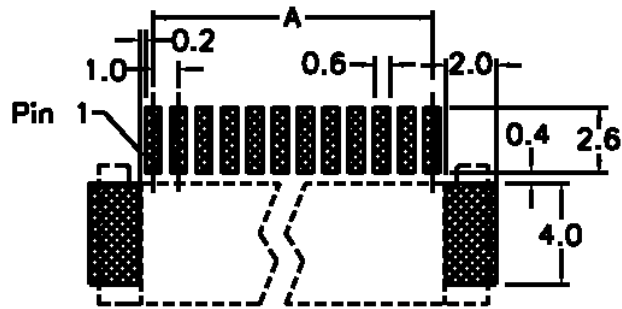

**P.C. Board Layout
S.M.D. Type (Top View)**

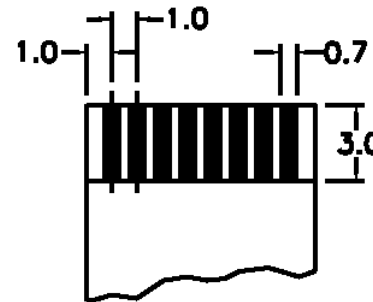

**FFC/FPC Dimension
Thickness 0.3±0.05mm**

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/02
				Checked	Lizzy	08/10/02
				Drawn	Tina	08/10/29
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
						UNIT: mm

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: CZF-G-XX-TN

Description: FFC/FPC connector, 1mm (.039") pitch