


SPECIFICATIONS

Voltage rating: 16VDC
 Current rating: 0.3 amps
 Contact material: Copper alloy
 Contact plating: Silver over nickel plating
 Contact resistance: 100 milliohms max.
 Housing material: High temperature thermoplastic, UL94V-0
 Insulation resistance: 100 megohms min. at 500VDC
 Dielectric withstanding: 500VAC for 1 min.
 Insertion force: 3.0kg min.
 Extraction force: 0.2kg min.
 Durability: 5,000 cycles min.
 Operating temperature: -25°C to +80°C

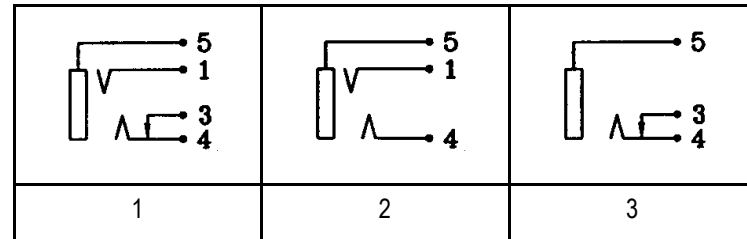

Series	Centering Post	Circuit	Options
DCJ	AJ330X	X	XX
Stereo jack	A=1.0mm post B=.08mm post	1=Circuit layout 1 2=Circuit layout 2 3=Circuit layout 2	SM=Surface mount TH=Through-hole

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DCJ-AJ330B-1-SM**

Description: Stereo jack, surface mount, ø3.5mm, tape and reel available