



T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)



SPECIFICATIONS

Current Rating: 2.0 A
 Voltage Rating: 16 VDC
 Withstanding: 500 VAC 60 sec
 Insulation Resist: 100 M Ω at 500V min.
 Contact Resist: 30 m Ω
 Durability: 5000 cycles min.

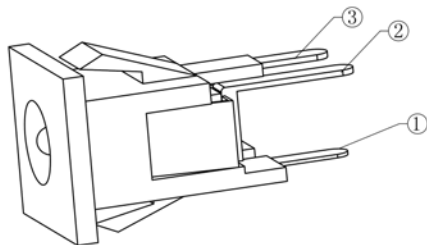

LEAD FREE

Item	Name	Material	Finish
1	Flat Piece	C2680 t=0.40	Ag Plated
2	Spring	C5191 t=0.25	Ag Plated
3	Curve Piece	C2680 t=0.40	Ag Plated
4	Pin	H59 (copper alloy)	Cu/Sn Plated
5	Housing	PA66	Black
6	Cover	PF	UL94V-0

Series	Type	Pin Diameter	Schematic	Terminal	Terminal Plating	Color
DCJ	D2043	A	C	ST	X	BK
DC Jack	Type D2043 Snap In; See Diagram	A=2.0mm	See Diagram Normally Closed	ST=Straight	S=Silver (std) T=Tin	BK=Black

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	05/02/13
				Checked	Lizzy	05/02/13
				Drawn	Tina	05/02/13
				0.0 \pm 0.35	0.00 \pm 0.20	Angles \pm 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DCJ-D2043-A-C-ST-X-BK**

Description: DC Power Jack, snap in