



SECTION A-A

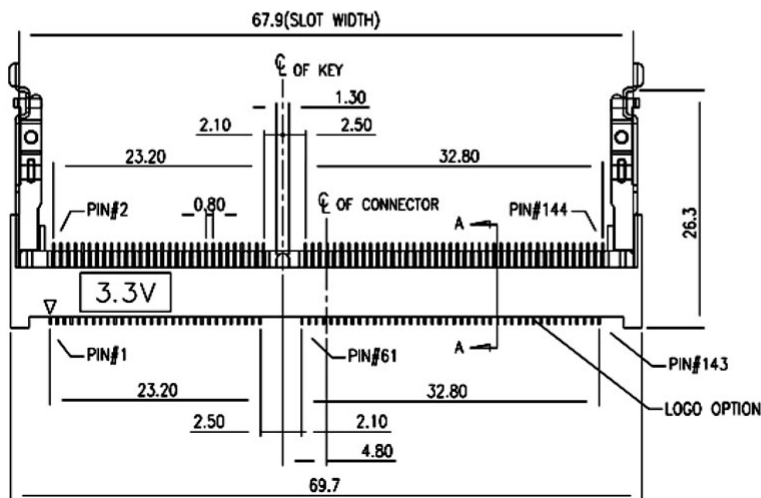

SPECIFICATIONS

- Current Rating: 0.3 Amps Max.
- Voltage Rating: 25 VAC
- Durability: 30 Mating Cycles
- Contact Retention Force: 0.15 KGF Min Per Pin
- Contact Resistance: 35 Milliohms Max. Initial
- Insulation Resistance: 250 Megaohms Min.
- Withstanding Voltage: 250VAC RMS @ 60Hz / min
- Housing: LCP UL94V-0, Ivory
- Contact: Phosphor Bronze or Brass
- Metal Spring & Solder Pad: SUS301
- Housing: Ivory Color
- Contact: Gold Plating Over Nickel (see chart)
- Operating Temp: -55C to +85C

| Series | Style | Contacts | Module | Type | Material | Color | Plating |
|-------------|-------------|--------------|--------|------------------|----------|----------|------------------------------|
| DIMM | 19154 | 144 | X | X | X | XX | XX |
| DIMM Socket | 19154 Style | 144 Contacts | 3=3.3V | SO=Small Outline | L=LCP | BK=Black | SG=Selective Gold GD=Gold |

RoHS compliant

| Rev. | Description | Date | Approved | Drawing | Name | Date |
|------|-------------|------|----------|------------|-------------|-------------|
| | | | | Approved | Howard | 04/29/01 |
| | | | | Checked | Lizzy | 04/29/01 |
| | | | | Drawn | Tina | 04/29/01 |
| | | | | 0.0 ± 0.35 | 0.00 ± 0.20 | Angles ± 3' |
| | | | | UNIT: mm | | |

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DIMM-19154-144-3-SO-L-BK-XX**

Description: SO DIMM 144 POS SMT

