

SPECIFICATIONS
 Voltage Rating: 0.3A 25 AC
 Insulation Resistance: 1000Mohm Min
 Housing Material: Thermoplastic
 Contact Material: Bronze
 Contact Resistance: 35m ohm max
 Withstanding: AC 250V for 1 minute
 Temperature Rating: -55°C to +85°C
 IR Reflow Soldering: 260°C, 5 Sec.

Series	Type	Pins	Color	Finish
DIMM	314047	204	BK	GD3
DIMM Socket	9.2mm 1.5V DDR	204=204 pins	BK=Black	GD3=3u" Gold Plate


RoHS compliant


Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	12/01/08
				Checked	Lizzy	12/01/08
				Drawn	Tina	12/01/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DIMM-314047-204-BK-GD3**

Description: Dimm Socket

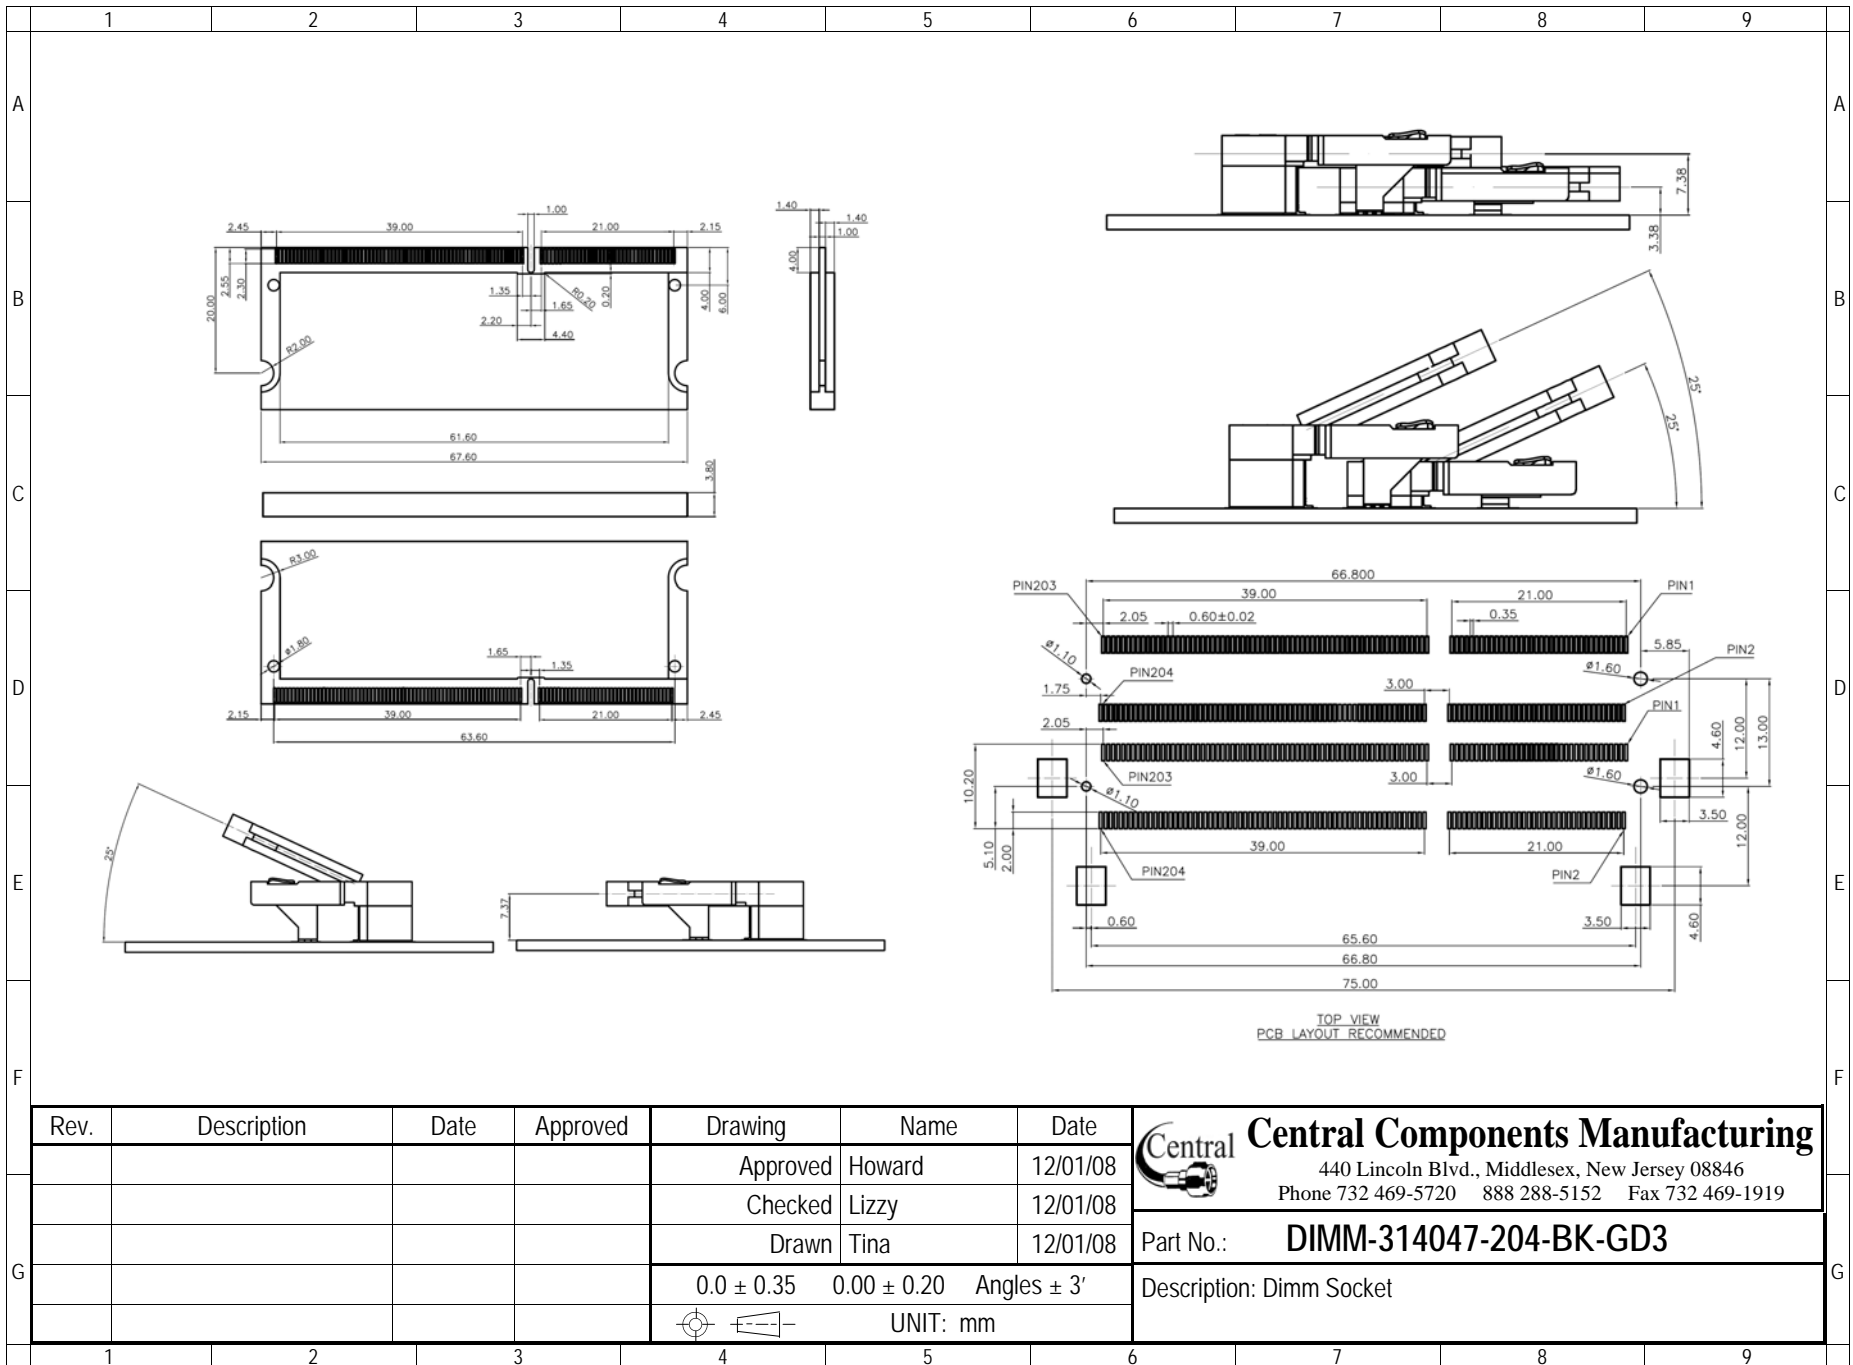

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	12/01/08
				Checked	Lizzy	12/01/08
				Drawn	Tina	12/01/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
						UNIT: mm


Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DIMM-314047-204-BK-GD3**

Description: Dimm Socket