

**SPECIFICATIONS**

Voltage Rating: 0.3A  
 Contact Material: Bronze  
 Contact Resistance: 35m ohm max  
 Housing Material: High Temp Thermoplastic  
 Insulation Resistance: 1000Mohm min  
 Withstanding: 250V AC  
 Operating Temp: -55°C to +85°C

Series	Type	Position	Color	Plating
DIMM	AT414A	204	BK	GD3
DIM Socket	1.5V Dram 4mm Base Height	204 Position	BK=Black	GD3=3u" Gold


RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	03/23/10
				Checked	Lizzy	03/23/10
				Drawn	Tina	03/23/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DIMM-AT414A-204-BK-GD3**

Description: SO DIMM Socket

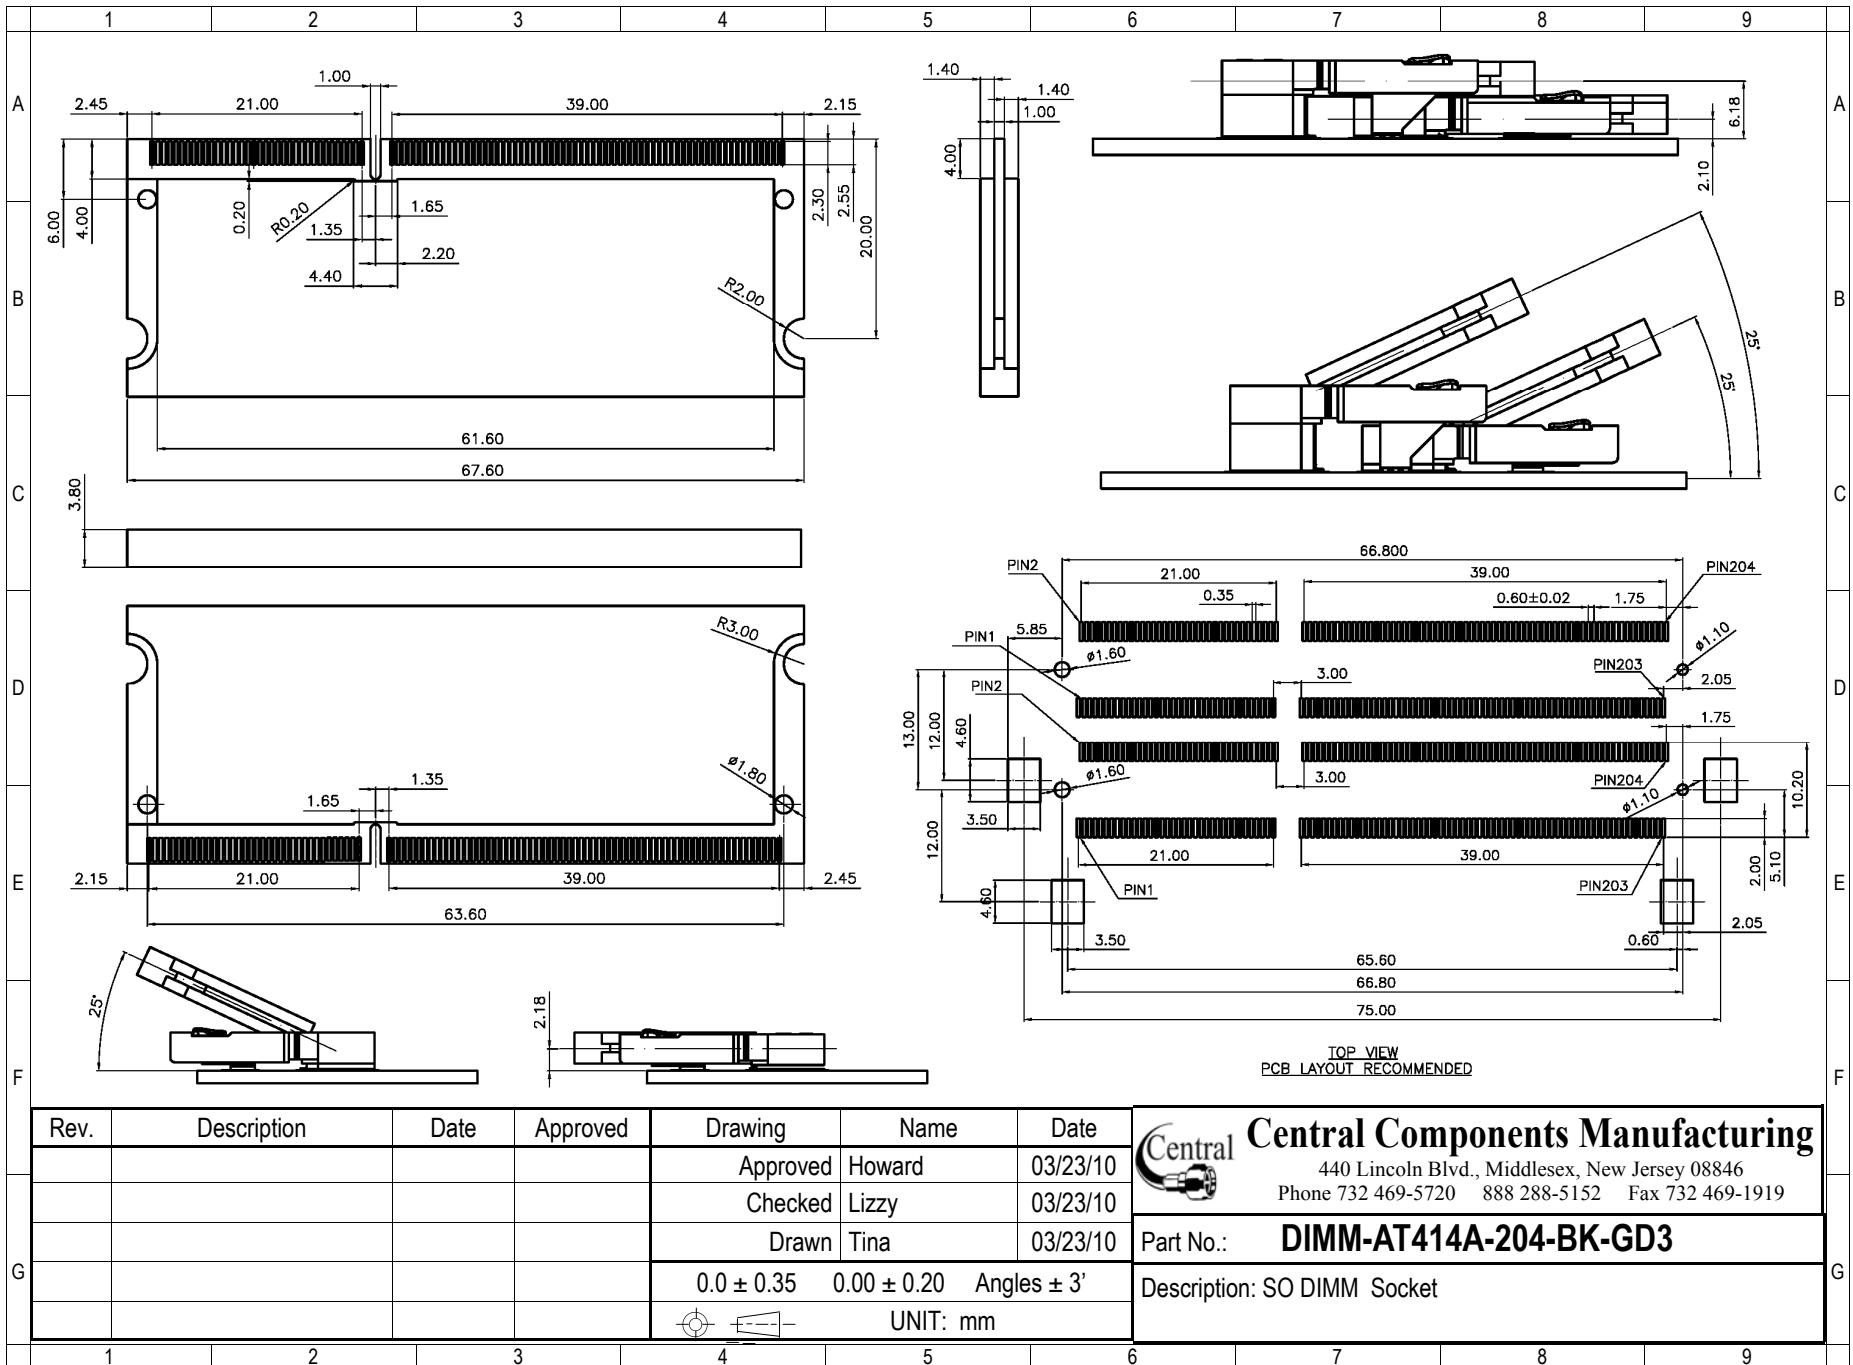

TOP VIEW  
PCB LAYOUT RECOMMENDED

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	03/23/10
				Checked	Lizzy	03/23/10
				Drawn	Tina	03/23/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				 UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DIMM-AT414A-204-BK-GD3**

Description: SO DIMM Socket

G

G