



SPECIFICATIONS

- Current rating: 3 amps
- Contact resistance: 25 milliohms max.
- Contact material: Brass
- Insulator material: PBT+30% glass fiber, UL94V-0
- Insulation resistance: 5,000 megohms min.
- Withstanding: 100VAC 1 min.
- Shell material: Steel
- Operating temperature: -55°C to +105°C
- Contact insertion force: 300gf max.
- Cont. separation force: 25gf min.

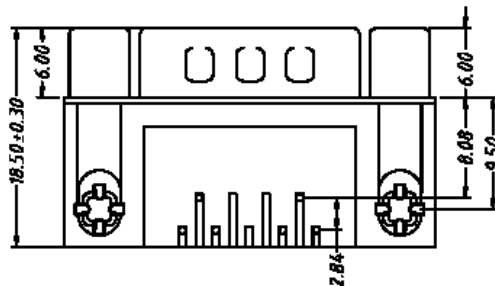

Series	Gender/Type	PCB Mount	Mounting/Face Options
DS09	MR	3P	AR
D-Subminiature, right-angle	MR=Male/plug, .318" footprint FR=Female/socket, .318" footprint	1=Wrap around ground straps with screw holes 2=Top side only ground straps (#4-40 threaded screw holes) 3=Forked board locks 3P=Forked board locks, pronged 4=Top side only ground straps with screw holes	A=#4-40 fixed jackscrews, hex heads AR=#4-40 fixed jackscrews, round heads B=#4-40 threaded inserts C=#4-40 threaded inserts with jackscrews installed D=.120" non-threaded through-holes

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DS09-MR-3P-AR**

Description: D-Subminiature connector, 9 positions, .318" footprint