
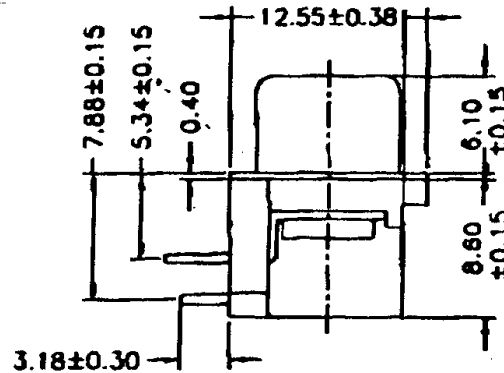


SPECIFICATIONS

Current rating: 5 amps
 Contact material: Bronze
 Contact resistance: 15 milliohms max.
 Shell material: Steel
 Shell plating: Zinc, tin or nickel
 Insulator material: PBT
 Insulation resistance: 1,000 megohms min. at 500VDC
 Withstanding: 500VAC for 1 min.
 Operating temperature: -55°C to +105°C

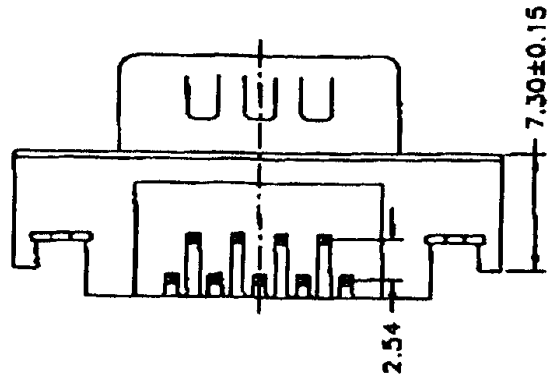

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				 UNIT: mm		
						Central Components Manufacturing 440 Lincoln Blvd., Middlesex, New Jersey 08846 Phone 732 469-5720 888 288-5152 Fax 732 469-1919
						Part No.: DS09-PL5-2
						Description: D-sub miniature connector, male, 9 position, right angle, .197 (5.00mm) pitch, slimline type