


SPECIFICATIONS
 Current Rating: 5.0 AMPS
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 5GΩ Min
 Withstanding: 1000V AC Min

Shell: steel material, front shell tin finished
 Back shell tin finished
 Dimples on plug only

Insulator: PBT thermoplastic, 30% glass filled,
 UL94V-0 rated, black

Signal Contact: copper alloy, full gold flash
 Operating Temp: -55°C to +125°C

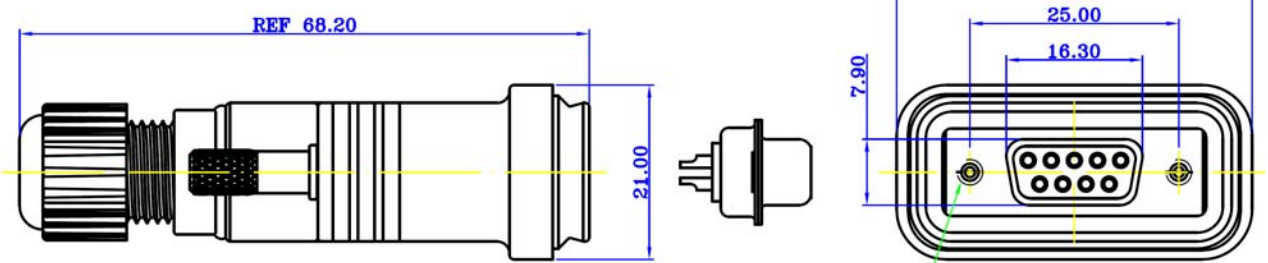

#4-40UNC

Series	Type
DSXXW	XB
Waterproof D Sub XX=09,15,25	FB=Female w/ Backshell MB=Male w/ Backshell

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	12/04/08
				Checked	Lizzy	12/04/08
				Drawn	Tina	12/04/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DS15W-FB**
 Description: Waterproof D-sub with backshell female connector,
 straight solder type