


SPECIFICATIONS

Shell: Steel Material, Front Shell Tin Finished
Back Shell Tin Finished
Dimples on Plug Only

Insulator: PBT Thermoplastic, 30% Glass Filled,
UL94V-0 Rated, Black Color

Contact Material: Copper Alloy
Contact Finish: Full Gold Flash
Contact Rating: 5.0 amps
Contact Resistance: 30 Milliohms Max.
Withstanding Voltage: 1000 V AC Min.
Insulation Resistance: 5000 Megohms Min.
Temperature Rating: -55C ~ +105C
Degree of Protection: According to IEC529-IP67

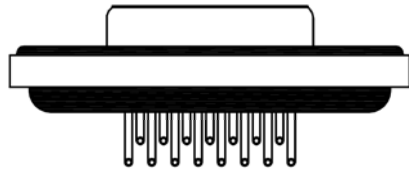

Series	Type	Shell Plating	Options
DSXXW	XX	XX	X
Waterproof D-Sub XX=09,15,25,37	FM=Female Machined Pin MM=Male Machined Pin	TN=Tin	03=Threaded Inserts

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	11/30/11
				Checked	Lizzy	11/30/11
				Drawn	Tina	11/30/11
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DS15W-FM-TN-03**

Description: waterproof D-Sub Connector