

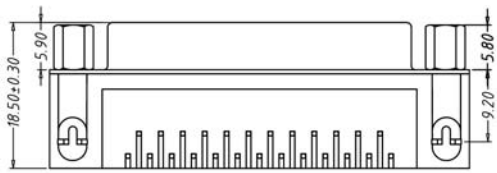


**SPECIFICATIONS**

- Current Rating: 3 Amp
- Contact Material: Brass
- Contact Resistance: 25 MilliOhms Max.
- Insulator Material: PBT
- Shell: Steel
- Insulation Resistance: 5000 Megohms min at DC 500V
- Insertion Force: 300gfMax
- Withdrawal Force: 25gf Min
- Withstanding: AC 1000
- Operating Temp: -55°C to +105°C



RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	05/04/06
				Checked	Lizzy	05/04/06
				Drawn	Tina	05/04/06
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				 UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DS25-FR-3-C-JKS6**

Description: D-Sub 90 DIP 7.2mm 25Pin Female