


SPECIFICATIONS


Current rating: 3 amps
 Voltage rating: 250VAC
 Contact material: Copper alloy
 Contact plating: Selective gold over 50µ" nickel
 Tin 100µ" in solder tail area
 Contact resistance: 25 milliohms max.
 Insulation material: PBT, UL 94V-0
 Insulation resistance: 3,000 megohms min at 500VDC
 Shell material: Steel
 Withstanding: 1,000VRMS for 1 min.
 Rivet, boardlock material: Copper alloy
 Operating temperature: -55°C to +105°C

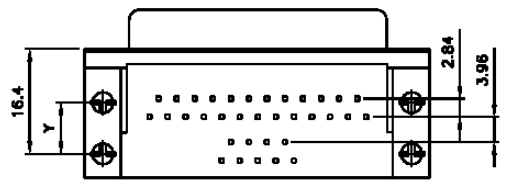

PARTS DIMENSION TABLE

parts no.	DIM. a	DIM. b	inner thread	out thread
B	4.8	11.8	4/40	4/40
D	5.8	12.0	4/40	4/40
F	4.8	11.8	M3	4/40
H	5.8	12.0	M3	4/40

inner thread out thread

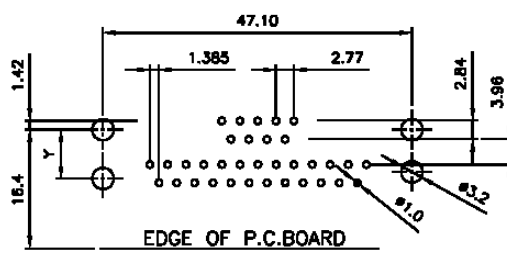

EDGE OF P.C.BOARD
RECOMMENDED P.C.B LAYOUT (TOP VIEW)
TOLERANCES: ±0.10mm

Process Option Dimension (Y)		Port Spacing Dimension (X)	
A	6.90	A	15.875
D	7.90	B	19.050
		C	22.860

Series	Gender	Port Spacing	Mounting Face	Options
DSDXX/YY	XX	X	X	XX
Dual-port D-sub	MM=Male over male	A=.625"	01=.120" thru hole	[blank]=None
XX=Upper position	MF=Male over female	B=.750"	02=#4-40 threaded hole	FF=Ferrite filter
YY=Lower position	FM=Female over male	C=.900"	03=#4-40 threaded insert w/jackscrew	30GD=30µ" gold plate
(Omit if same as upper)	FF=Female over female		04=Boardlocks, front and rear	15GD=15µ" gold plate
	FMF=Female over male-female		04S=Boardlocks, rear only	
			04F=Boardlocks, front only	

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DSD09/25-FF-B-0204**

Description: D-subminiature connector, stacked, 09P female over 20P female, #4-40 threaded holes, board locks front and rear