


**SPECIFICATIONS**  
 Current Rating: 3 Amps  
 Withstanding: AC 1000  
 Insulation Resistance: 1000 Megohms Min.  
 Contact Resistance: 25 Milliohms Max  
 Operating Temp: -55C to 105C

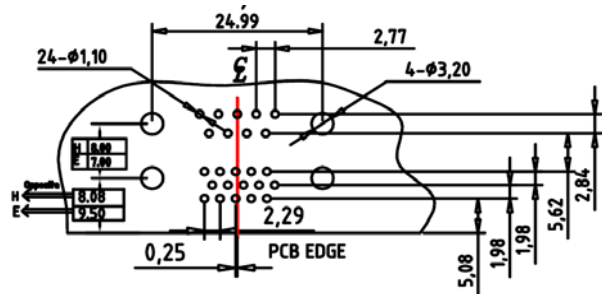

Series	Gender	Port Spacing	Mounting Face Options
DSDXX	XX	X (D)	X
Stacked D-Sub Connector XX=Pins 09,15,25,37 XX/XX=mixed	Top to bottom MF=Male, Female MM=Male, Male FF=Female, Female FM=Female, Male	A=0.625 (15.9) B=0.750 (19.0)	01=.120" thru hole 02=#4-40 threaded hole 03=#4-40 threaded insert w/ jackscrew 04=Boardlocks, front and rear 04S=Boardlocks, rear only 04F=Boardlocks, front only

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	04/04/02
				Checked	Lizzy	04/04/02
				Drawn	Tina	04/04/02
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
						UNIT: mm

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DSD09/HD15-MF-0203**

Description: Stacked Right Angle Dual Port Dsub