





SPECIFICATIONS

Current Rating: 3 Amp
 Contact Material: Brass
 Contact Resistance: 25 MilliOhms
 Insulator Material: PBT+30% (UL94V-0)
 Insulation Resistance: 5000 Megohms Min ad DC 500V
 Shell Material: Steel
 Insertion Force: 300gf Max
 Separation Force: 25gf Min
 Withstanding: AC 1000/60 Sec r.m.s.
 Operating Temp: -55°C to +105°C

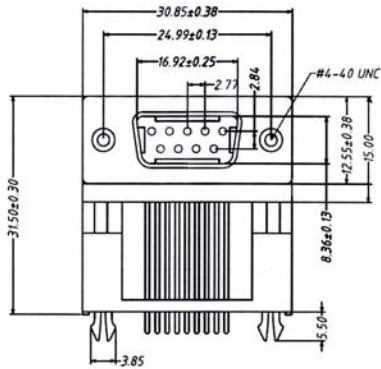

RECOMMENDED PCB LAYOUT

Series	Gender	Port Spacing	Mounting/Face Options	Options
DSXX	XX	X (D)	XX	XX
D-sub connector XX=Pins 09, 15, 25, 37 XX/XX=mixed 0=No Connector	Top then bottom MF=Male, female MM=Male, male FF=Female, female FM=Female, male	A=0.625 B=0.750 C=0.900	01=0.120 thru-holes 02=#4-40 threaded thru-holes 03=#4-40 threaded inserts with jack screws installed 04=Forked board locks 04S=Rear board locks only 04F=Front board locks only	[blank]=None GD15=15µ" gold on mating area GD30=30µ" gold on mating area

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	09/18/07
				Checked	Lizzy	09/18/07
				Drawn	Tina	09/18/07
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DSD09/0-M1-B-0204**

Description: D-sub 9 Pin

