


**SPECIFICATIONS**

Current Rating: 3 Amp  
 Insulation Resistance: 5000 Megohms Minimum  
 Contact Resistance: 8 Milliohms Max  
 (low level) 32 Milliohms max  
 Magnetic Permeability: 2u Max  
 Shock: 50g  
 Vibration: 20g  
 Mating Force: 150 Ounces Max  
 Durability: 500 Mating Cycles Minimum  
 Connector Shell: Aluminum Alloy, Nickel Plating  
 Contact Socket: Copper Alloy, Gold over Nickel Plating  
 Pigtail Wire: 28AWG, Yellow  
 Insulator: PBT (LCP Available)  
 Withstanding: 600 VAC Sea Level  
 Operating Temp: -55C to +150C  
 Salt Spray: 48 Hours

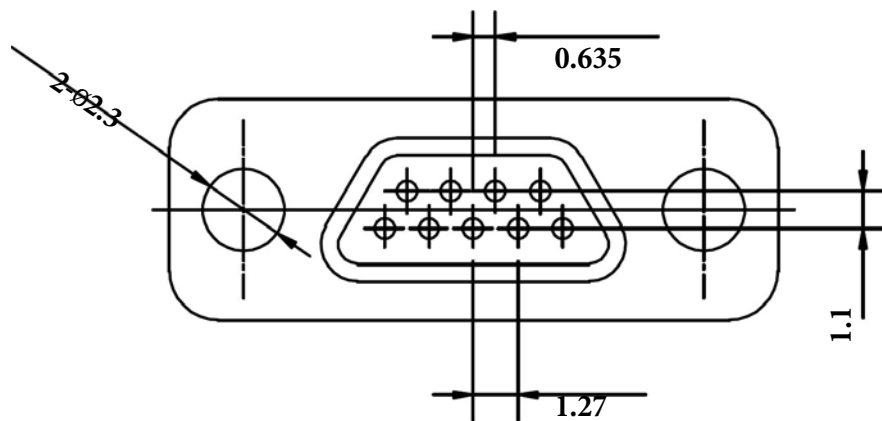

Series	Gender	Mounting Options
DSMXX	XT	XXX
D-sub connector XX=Pins 09, 15, 25, 37	MT=Male FT=Female	[blank]=.120" through holes RCN=Riveted clinch nuts #4-40 RJS=Riveted jackscrews #4-40

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	09/29/09
				Checked	Lizzy	09/29/09
				Drawn	Tina	09/29/09
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DSM09-MT-A**

Description: Micro D-subminiature Crimp connector, 9P male