



SPECIFICATIONS

Voltage Rating: 500V AC for 1 Minute
 Current Rating: 5 Amps
 Contact Resistance: 15 Mohms Max.
 Insulation Resistance: 1000 Mohms Min
 Shell: Steel, Tin or Zinc Plated
 Insulator: PBT+30% FiberGlass UL94V-0
 Contact: Brass, Machined Gold Flash
 Temperature Range: -50C to +100C

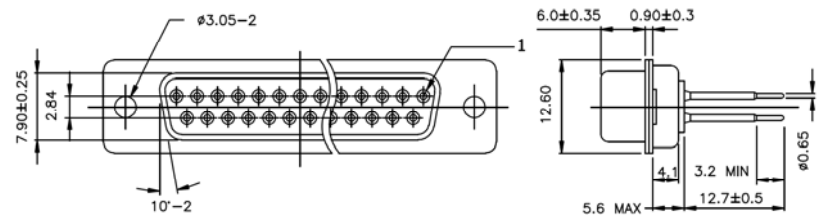

Dimensions			
Item	A	B	C
09	30.80	24.99	16.30
15	39.15	33.32	24.65
25	53.00	47.04	38.40
37	69.30	63.50	54.80
50	67.00	61.00	52.20

PCB LAYOUT

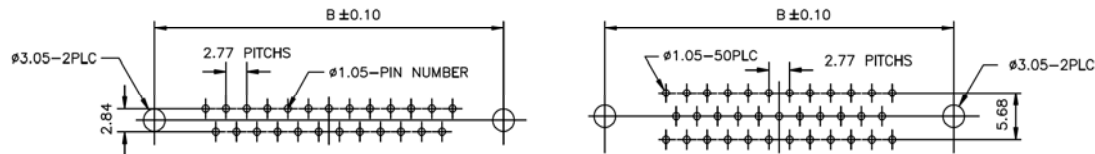

Series	Type	Tail	Mounting/Face Options	Contact Finish
DSXX	XMT	X	XX	XX
D-Sub Connector XX=09,15,25,37	MMT=Male IDC FMT=Female IDC	A=Standard for .062" to .125" PCB B=Wire Wrap	01=Fixed #4-40 Jackscrews0 02=.120" through holes 03=Threaded Inserts 04=Th. Inserts w/Jackscrews 05=Stand off with board locks	[Blank]=SG SGXX=Selective Gold XX=Flash if blank, 5,10,15,20,30u" GD=Gold Flash

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	05/03/03
				Checked	Lizzy	05/03/03
				Drawn	Tina	05/03/03
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
						UNIT: mm

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DSXX-FMT-B-02-XX**

Description: Machined contact D-Sub, female, vertical PCB mount