


SPECIFICATIONS

| | |
|------------------------|------------------------------|
| Current rating: | 5 amps |
| Contact material: | Brass |
| Contact plating: | Gold |
| Contact resistance: | 15 milliohms max. |
| Insulation material: | PBT+30% glass fiber, UL94V-0 |
| Insulation resist.: | 1,000 megohms min. |
| Withstanding: | 500VAC for 1 min. |
| Clinched nut material: | Brass |
| Clinched nut plating: | Nickel |
| Shell material: | Steel |
| Shell plating: | Tin or yellow chromate |
| Temperature range: | -50°C to +100°C |

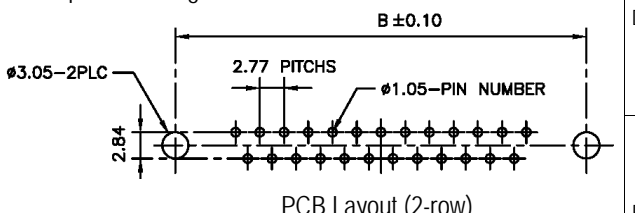

| Dimensions (mm) | | | |
|-----------------|-------|-------|-------|
| Pos. | A | B | C |
| 9 | 30.80 | 24.99 | 16.30 |
| 15 | 39.15 | 33.32 | 24.65 |
| 25 | 53.00 | 47.04 | 38.40 |
| 37 | 69.30 | 63.50 | 54.80 |
| 50 | 67.00 | 61.00 | 52.20 |

| Series | Type | Tail options | Face options | Other options |
|---|--|--|---|---|
| DSXX | XX | X | XXX | XX |
| D-sub connector XX=Pins 9, 15, 25, 37, 50 | FT=Female vertical mount MT=Male vertical mount MHT=Male high profile FHT=Female high profile | A=Standard for .052" to .125" PCB B=Wire wrap | [blank]=.120" thru hole RCN=Clinch nut RJS=Jackscrew RSB=Standoff with board locks | [blank]=None FF=Ferrite filter YC=Yellow chromate shell GD30=30u" Gold Plating |

RoHS compliant

| Rev. | Description | Date | Approved | Drawing | Name | Date |
|------|----------------|----------|----------|------------|-------------|-------------|
| | Specs verified | 03/30/07 | Allen | Approved | Howard | 08/10/99 |
| | | | | Checked | Lizzy | 08/10/99 |
| | | | | Drawn | Tina | 08/10/99 |
| | | | | 0.0 ± 0.35 | 0.00 ± 0.20 | Angles ± 3' |

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DSXX-FT-A-RCN-XX**

Description: D-subminiature connector, female, straight PCB tail, standard profile

