


SPECIFICATIONS

Current Rating: 3 Amps
 Withstanding: AD 500V at sea level
 Insulation Resistance: 1000 Megohms Min.
 Contact Resistance: 30 Milliohms Max.
 Contact: Copper Alloy
 Insulator: PBT
 Z Piece: Fe
 Screw: Copper Alloy
 Rivet: Copper Alloy or Zinc
 Operating Temp: -55C to +105C

Recommend PCB Layout

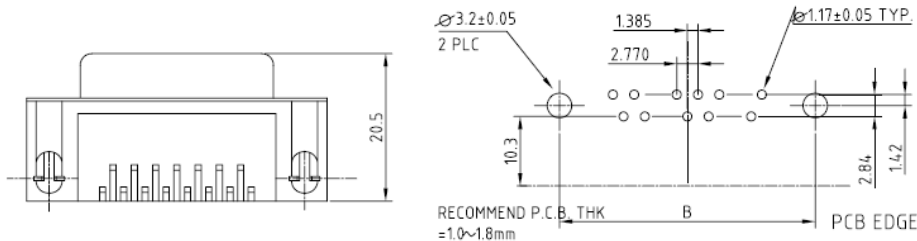

Dimensions			
Pos.	A	B	C
09	16.33	24.99	30.81
15	24.66	33.32	39.17
25	38.38	47.04	53.04
37	54.83	63.50	69.32

Series	Type/Footprint	Board Mounting	Face Mounting	Material	Shell Plating	Contact Plating	Color
DSXX	XY	3	XY	X	X	GDX	XX
D-Sub Connector X=Pins 09, 15, 25, 37	X: F=Female M=Male Y: 7=7.2 9=9.4 14=13.84	3=Board Lock	X: A=#4-40 Fixed Jack Screw B=#4-40 Threaded Inserts C=#4-40 Jack Screw With Threaded inserts CN=Jackscrews Unin- stalled Y: Blank=None 4=4.8 Jackscrews 5=5.8 Jackscrews	P=PBT L=LCP C=PA6T E=PA9T	T=Tin N=Nickel G=Gold	GD=Gold X=Flash If Blank 3, 5, 10, 15, 30µ"	BK=Black WT=White YL=Yellow GN=Green BL=Blue

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	10/10/05
				Checked	Lizzy	10/10/05
				Drawn	Tina	10/10/05
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DSXX-FY-3-XY-X-X-GDX-XX**

Description: Right angle Board Mount D-Sub